

Polarization-Maintaining Fiber Collimator

780nm (Working Distance 100mm)



● Product Description

It is composed of polarization-maintaining fiber pigtail and focusing lens with precise positioning and packaging, which can transform the outgoing light of fiber transmission into parallel beam (Gaussian beam), or focus and couple the parallel light from the outside into the fiber. It can be used alone to achieve the specified size spot at the required position; it can also be used in pairs, adding filters, isolators and other optical components between a pair of probes to achieve the purpose of customer use. In the interferometric fiber sensor based on optical coherence detection, the use of polarization-maintaining fiber can ensure that the linear polarization



direction remains unchanged, improve the coherent signal-to-noise ratio, and achieve high-precision measurement of physical quantities.

● Product features

Ensure partial compatibility; Low insertion loss; High precision straight;

Compact type; Anti reflective film

● Part Number

MP-CLM-780-100-2.4-FA

● Application area

Fiber Optic Communication | Data Sensing | Industrial Inspection | Medical

Equipment | Instrument Integration

● Core parameters

Working Wavelength	Bandwidth	Working Distance
780nm	$\pm 20\text{nm}$	100mm


● General Parameters

When making a polarization-maintaining device connector, the cat's eye connection axis direction is perpendicular to the keyway direction, also known




as slow axis alignment, and vice versa is fast axis alignment. As shown in the

figure:

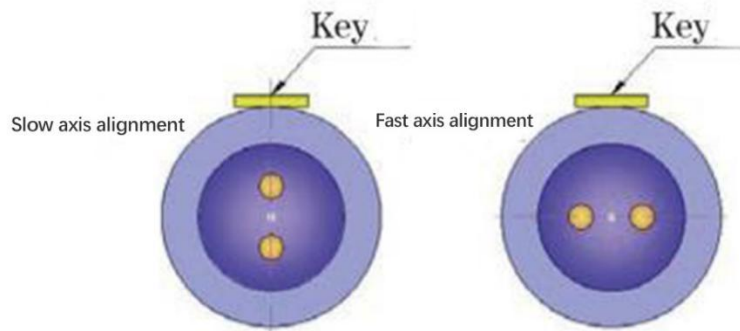

Product model diagram

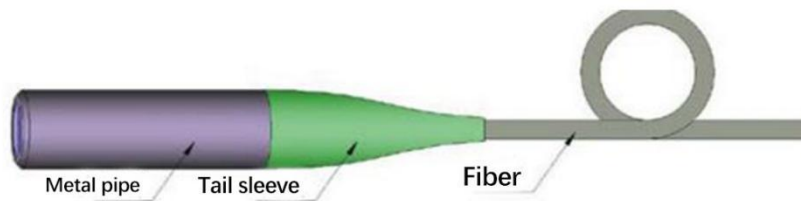

Parameters

PM630 Polarization-Maintaining Fiber Collimator (Fixed Working Distance)									
Working wavelength	Band width	Working distance	Beam waist spot	Beam divergence	Packaging diameter	Connector	Output loss	Return loss	Mode field core diam
							(excluding connector)		



				angle	er				eter
635nm	± 20nm	100mm	0.39mm	2.6mrad	3.4mm	FC/A PC	≤0.5dB	≥ 55dB	4.5± 0.5um
635nm	± 20nm	300mm	0.85mm	1.0mrad	3.4mm	FC/A PC	≤0.5dB	≥ 55dB	
635nm	± 20nm	1000mm	1.32mm	0.7mrad	4.0mm	FC/A PC	≤0.5dB	≥ 55dB	
PM780 Polarization-Maintaining Fiber Collimator (Fixed Working Distance)									
Working wavelength	Band width	Working distance	Beam waist spot	Beam divergence angle	Packaging diameter	Connector	Output loss		Mode field core diameter
							(excluding connector)	Return loss	
780nm	± 20nm	100mm	0.45mm	2.4mrad	3.4mm	FC/A PC	≤0.5dB	≥ 55dB	5.2± 1.0um
780nm	± 20nm	300mm	0.75mm	1.3mrad	3.4mm	FC/A PC	≤0.5dB	≥ 55dB	
780nm	± 20nm	1000mm	1.55mm	0.7mrad	4.0mm	FC/A PC	≤0.5dB	≥ 55dB	



PM980 Polarization-Maintaining Fiber Collimator (Fixed Working Distance)									
Working wavelength	Band width	Working distance	Beam waist spot	Beam divergence angle	Packaging diameter	Connector	Output loss	Return loss	Mode field core diameter
							(excluding connector)		
980nm	± 20nm	100mm	0.50mm	2.5mrad	3.4mm	FC/A PC	≤0.35dB	≥ 55dB	6.6 ± 0.5μm
980nm	± 20nm	300mm	0.96mm	1.3mrad	3.4mm	FC/A PC	≤0.35dB	≥ 55dB	
980nm	± 20nm	1000mm	1.48mm	0.87mrad	4.0mm	FC/A PC	≤0.35dB	≥ 55dB	
1064nm	± 20nm	100mm	0.51mm	2.7mrad	3.4mm	FC/A PC	≤0.35dB	≥ 55dB	
1064nm	± 20nm	300mm	0.90mm	1.5mrad	3.4mm	FC/A PC	≤0.35dB	≥ 55dB	
1064nm	± 20nm	500mm	1.43mm	0.95mrad	4.0mm	FC/A PC	≤0.35dB	≥ 55dB	
PM1300nm Polarization-Maintaining Fiber Collimator (Fixed/Adjustable Working Distance)									



Working wavelength	Band width	Working distance	Beam waist spot	Beam divergence angle	Packaging diameter	Connector	Output loss	Maintaining loss	Return loss	Mode field core diameter
1310nm	± 20nm	100 mm	0.4 mm	4.2m rad	3.4 mm	FC/A PC	≤ 0.35dB	≤ 0.7dB	≥ 55dB	9.3 ± 0.5um
1310nm	± 20nm	300 mm	0.8 mm	2.1m rad	3.4 mm	FC/A PC	≤ 0.35dB	≤ 0.9dB	≥ 55dB	
1310nm	± 20nm	1000 mm	1.2 mm	1.4m rad	4.0 mm	FC/A PC	≤ 0.35dB	≤ 1.1dB	≥ 55dB	
PM1550nm Polarization-Maintaining Fiber Collimator (Fixed/Adjustable Working Distance)										
Working wavelength	Band width	Working distance	Beam waist spot	Beam divergence angle	Packaging diameter	Connector	Output loss	Maintaining loss	Return loss	Mode field core diameter



			spot	e	met					diam
				angl	er					eter
				e						
1550n	±	100	0.45	4.4m	3.4	FC/A	≤	≤	≥	10.1
m	20nm	mm	mm	rad	mm	PC	0.5dB	0.7dB	55dB	
1550n	±	300	0.86	2.3m	3.4	FC/A	≤	≤	≥	±
m	20nm	mm	mm	rad	mm	PC	0.5dB	0.9dB	55dB	0.5u
1550n	±	500	1.3	1.5m	4.0	FC/A	≤	≤	≥	m
m	20nm	mm	mm	rad	mm	PC	0.5B	1.1dB	55dB	

Beam waist spot diameter: Take the Gaussian beam at $1/e^2$, and select the theoretical calculated value of single-mode optical fiber of each wavelength

Matching loss: - Fiber collimator couples the free space beam between the two

Packaging material, packaging size and other fiber connector types can be customized