

Multimode Fiber Chromatic Aberration Collimator 905nm (Beam Waist Spot Diameter 4mm)



- **Product Description**

It is composed of a group of large numerical aperture lens systems, suitable for multimode fibers with larger numerical apertures. This system can reshape the beam emitted from the multimode fiber, or couple a collimated

beam into the multimode fiber, ensuring good collimation and beam shape over long distances.

- **Product features**

Large numerical aperture design、 Can be used for collimation or coupling 、

Non-magnetic stainless steel housing

- **Part Number**

MP-CLM-905-4-0.2-PFA-P

- **Application area**


Optical Network Testing | Industrial Sensing | Medical Endoscopes | Security

Monitoring | Fiber Optic Device Testing

- **Core parameters**

Center Wavelength	Lens Coating Wavelength	Beam Waist Spot
905nm	700-1100nm	4mm

- **General Parameters**

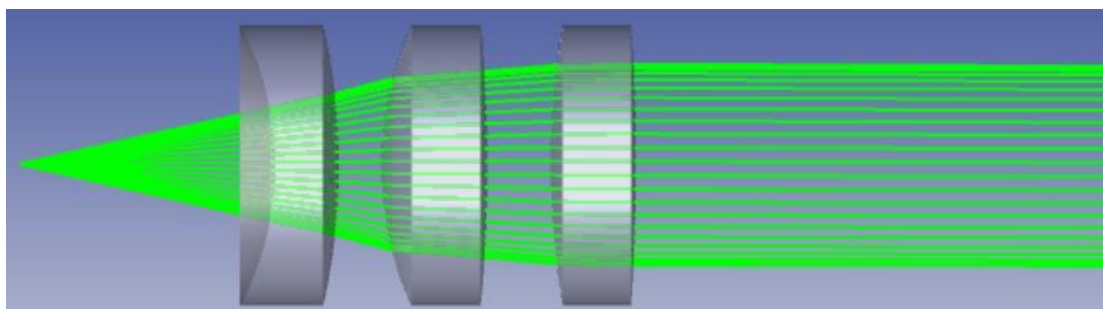

635nm Multimode Fiber Achromatic Collimator

Central wavelength	Lens coating wavelength	Beam waist spot	Beam divergence angle	Effective focal length	Numerical aperture (lens)	Package diameter	Accessories fiber type	Connector	Transmittance
635nm	400~700nm	4mm	0.2°	10mm	0.37	Φ11mm	62.5/125	FC/PC	>90%
		10mm	1.0°	25mm	0.25	Φ15mm	105/125	Sma905	

780nm Multimode Fiber Achromatic Collimator

Central wavelength	Lens coating wavelength	Beam waist spot	Beam divergence angle	Effective focal length	Numerical aperture (lens)	Packaging diameter	Accessories fiber type	Connector	Transmittance
780nm	700~1100nm	4mm	0.2 °	10mm	0.37	Φ 11mm	62.5/125	FC/PC Sma905	>90%
		10mm	1.0 °	25mm	0.25	Φ 15mm	105/125		

850nm Multimode Fiber Achromatic Collimator

Central wavelength	Lens coating wavelength	Beam waist spot	Beam divergence angle	Effective focal length	Numerical aperture (lens)	Packaging diameter	Accessories fiber type	Connector	Transmittance
850nm	700~1100nm	4mm	0.2 °	10mm	0.37	Φ 11mm	62.5/125	FC/PC Sma90	>90%

		10m	1.0 °	25mm	0.25	Φ	105/1	5	
		m				15mm	25		

905nm Multimode Fiber Achromatic Collimator

Central wavelength	Lens coating wavelength	Beam waist spot	Beam divergence angle	Effective focal length	Numerical aperture (lens)	Packaging diameter	Accessories fiber type	Connector	Transmittance
905nm	700~	4mm	0.2 °	10mm	0.37	Φ 11mm	62.5/1 25	FC/PC	>90%
	1100nm	10mm	1.0 °	25mm	0.25	Φ 15mm	105/1 25	Sma90 5	

1064nm Multimode Fiber Achromatic Collimator

Central wavelength	Lens coating wavelength	Beam waist spot	Beam divergence angle	Effective focal length	Numerical aperture (lens)	Packaging diameter	Accessories fiber type	Connector	Transmittance

1064nm	1050~	4m	0.2 °	10mm	0.37	Φ 11mm	62.5/125	FC/PC	>90%
	1700nm	10m	1.0 °	25mm	0.25	Φ 15mm	105/125	Sma905	

1310nm Multimode Fiber Achromatic Collimator

Central wavelength	Lens coating wavelength	Beam waist spot	Beam divergence angle	Effective focal length	Numerical aperture (lens)	Packaging diameter	Accessories fiber type	Connector	Transmittance
1310nm	1050~	4m	0.2 °	10mm	0.37	Φ 11mm	62.5/125	FC/PC	>90%
	1700nm	10m	1.0 °	25mm	0.25	Φ 15mm	105/125	Sma905	

1550nm Multimode Fiber Achromatic Collimator

Central wavelength	Lens coating wavelength	Beam waist spot	Beam divergence angle	Effective focal length	Numerical aperture (lens)	Packaging diameter	Accessories fiber type	Connector	Transmittance
1550nm	1050~ 1700nm	4mm	0.2 °	10mm	0.37	Φ 11mm	62.5/1 25	FC/PC Sma90 5	>90%
		10mm	1.0 °	25mm	0.25	Φ 15mm	105/1 25		