

Polarization diversity coherent reception module (InGaAs balanced photodetector 1510-1590nm, bandwidth 2GHz)



● Product Description

The IdealPhotonics' PDR series polarization diversity reception module is designed for polarization-sensitive fiber optic sensing applications. This polarization diversity reception module coherently detects the two polarization states of the local oscillator and signal light separately, using

two high-speed, low-noise balanced detectors for independent reception. It effectively solves the issue of coherent polarization states and is suitable for applications in distributed fiber optic sensing, laser wind radar, optical coherence tomography, and other related fields.

● Product features

High bandwidth、High Gain、Low Noise、Built-in low-noise isolation power supply

● Part Number

MP-PDR-M-I-2000-F-A

● Application area

Optical fiber sensing、Laser wind radar、Optical coherence tomography、Spectral measurement

● Core parameters

Wavelength	Bandwidth	Responsivity
1510-1590nm	2GHz	0.95A/W@1550nm




● General Parameters


Wavelength		1510~1590 (1300±40nm; 1060±40nm Optional)											nm
Bandwidth		100M	200M	350M	400M	500M	800M	1G	1.2G	1.5G	2G	2.5G	Hz
Detector Responsivity		0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95	A/W@ 1550nm
Transimpedance Gain		30K	30K	30K	10K	5K	30K	30K	30K	30K	15K	15K	V/A
Input Light	Local	<5	<5	<5	<5	<5	<5	<5	<5	<5	<5	<5	mW
	Signal	300	300	300	300	300	300	300	300	300	300	300	μW
Polarization Extinction Ratio		22	22	22	22	22	22	22	22	22	22	22	dB
NEP		5	5	5	7	7	9	9	9	9	9	9	pW/Sqrt(Hz)
Supply Voltage		5	5	5	5	5	12	12	12	12	12	12	V
Supply Current		0.4(max)	0.4(max)	0.4(max)	0.4(max)	0.4(max)	0.3(max)	0.3(max)	0.3(max)	0.3(max)	0.3(max)	0.3(max)	A

Output												
Coupling	AC	AC	AC	AC	AC	AC	AC	AC	AC	AC	AC	
Method												
Interface Type	Electrical Interface: SMA						Fiber Interface: FC/APC					
Fiber Type	Local: PM; Signal: SM											
RF Output	SMA											
Dimensions	120*100*25mm (Optional 90*80*20mm)											

Testing:

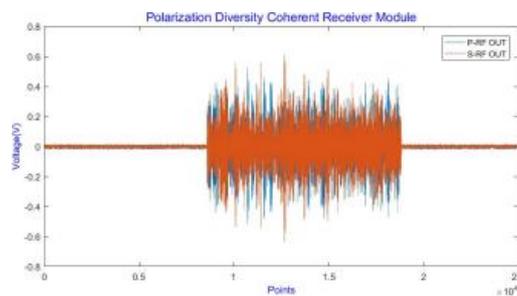

Coherent signals of P polarization state and S polarization state.

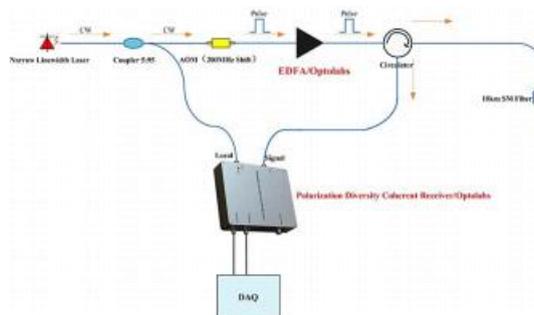

Polarization diversity coherent reception optical circuit diagram.