


1064nm Wide Passband

Polarization-Maintaining Bandpass Fiber Filter

(Passband 2nm @ -0.5dB, 1m Pigtail, PM980 Fiber)

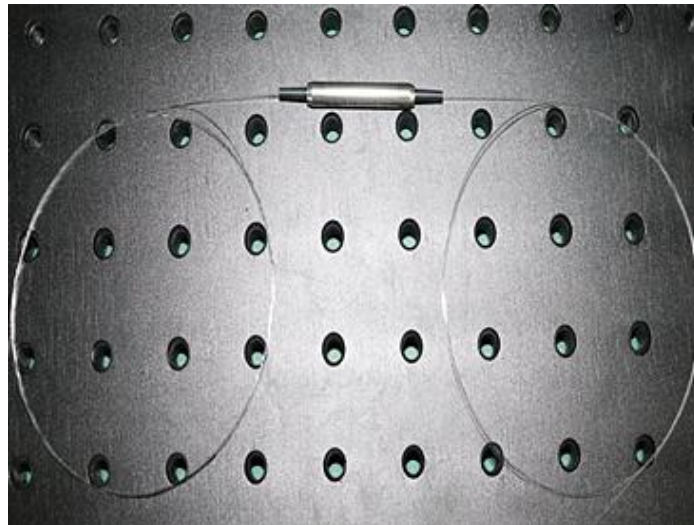

- **Product Description**

Idealphotonics' fiber filters utilize a specialized fiber structure to selectively transmit or block specific wavelengths of light. We offer different optical power versions of our filters based on user requirements. These filters can

be applied in fields such as dense wavelength division multiplexing (DWDM) fiber communication, frequency division multiplexing fiber communication, spectral testing, fiber sensors, fiber lasers, and fiber amplifiers. For customized center wavelengths, operating temperatures, or specific bandwidths, please contact us for customization.

- **Product features**

Wide passband range 、 Low insertion loss 、 High channel isolation 、 Stable operating performance

- **Part Number**

MP-BPF-1064-2-pA


- **Application area**

Fiber Amplifiers 、 WDM & DWDM Systems 、 Fiber Optic Devices 、 Fiber Lasers


- **Core parameters**

Center Wavelength	Fiber Type	Connector Type
1064nm	PM	FC/APC

● Dimension Drawing

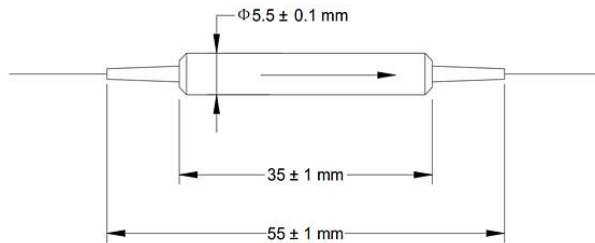

TypeA: Optical power for reflect band ≤ 300 mW

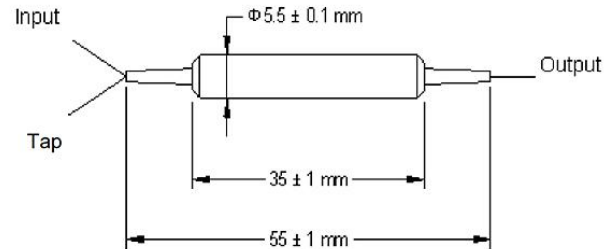

TypeB: Optical power for reflect band > 300 mW

● General Parameters

Parameters

Parameter	Unit	Value				
Central wavelength (λ_c)	nm	1030/1053/1064nm				
Minimum passband @ -0.5 dB	nm	2	5	8	14	22
Maximum stopband @ -25 dB	nm	12	18	20	48	50
Central wavelength	nm	1030				
Minimum passband @ -0.5 dB	nm	2		8	25	
Maximum stopband @ -25 dB	nm	12		22	50	
Maximum insertion loss	dB	1				
Minimum return loss	dB	50				
Maximum polarization-dependent loss	dB	0.1				
Thermal stability	dB/°C	≤0.005				

Maximum average optical power	W	3
Maximum peak power for ns pulses	kW	5
Maximum tensile load	N	5
Fiber type		HI 1060 fiber or Specify
Operating temperature	°C	-5 to +70
Storage temperature	°C	-40 to +85

Notes:

*. All specifications are without connectors and are only valid at the wavelengths, polarization states, and temperatures mentioned above.

**. Specifications are subject to change without notice.

Ordering information

MP-BPF-W□□□□ -B○-P▽ -☆-△ -XX

W□□□□: Wavelength

1064: 1064nm

1050: 1050nm

1030: 1030nm

1550: 1550nm

1580: 1580nm



BO: -0.5dB bandpass width

2: 2nm

5: 5nm

8: 8nm

14: 14nm

22: 22nm

P▽: Package

1: With Out Tap

2: With Tap

☆ : Pigtail Length

05: 0.5m

1: 1m

10: 10m

△: Loose Tube

B: Bare Fiber

9: 900um Loose Tube

20: 2mm Loose Tube

30: 2mm Loose Tube

XX: Fiber and Connector Type

SA=Hi1060+ FC/APC



SP=HI1060+ FC/PC

PA=PM 980Fiber+ FC/APC

PP=PM980 Fiber+ FC/PC

PN= PM Fiber+ none

