

980nm 420mW Benchtop Light Source



● Product Description

Idealphotonics' Cobrite series 980nm high-stability single-mode pump source utilizes a single-mode semiconductor laser with an FBG wavelength-stabilizing grating, offering wavelength stability and high output power. Based on an advanced microprocessor control system combined with high-precision ATC and ACC (APC) control circuits, it achieves highly stable laser output while ensuring quick and intuitive operation of the light source. We can also provide corresponding communication interfaces and control software based on user requirements



to enable computer control. This light source features a Turn-Key pump laser protection function to effectively prevent user errors. It supports coarse power adjustment (50mW steps) and fine power adjustment (0.1mW steps). Idealphotonics' Cobrite series 980nm single-mode pump source is a high-stability pump source designed for applications such as high-power fiber amplifiers and mode-locked fiber lasers. Since ASE light generated by active fibers can easily damage the pump laser, Idealphotonics' provides targeted pump protection solutions to further enhance the safety of the pump source. Idealphotonics Cobrite series 980nm single-mode pump source is a highly integrated desktop system light source with a high-definition LCD display, continuously adjustable output power, and synchronous current and voltage display, making it ideal for experimental scientific research and production testing. Additionally, the company can provide modular packaging based on user needs for easy system integration.

● Product features

Single-mode high-power output: up to 1W、FBG grating wavelength locking, no drift、ASE optical isolation protection design、Stable and continuously adjustable output power、LCD status display、High-precision ACC and ATC

control circuits、 Optional built-in isolator、 HI1060 fiber/PM980 fiber optional

● Part Number

MP-FP-980-420-B-0-SA

● Application area

High-power low-noise EDFA、 Mode-locked fiber lasers、 Ytterbium-doped fiber amplifiers、 Test and measurement、 Nonlinear effect research

● Core parameters

Center Wavelength	Output power	Output fiber connector
980nm	420mW	FC/APC

● General Parameters

Parameters

Parameters	Unit	Specs		
		Min.	Typ.	Max.
Output Power1	mW	90	-	1000mW



Peak Operating Wavelength ²	nm	970	975	985nm
Spectral Width (FWHM) with FBG	nm	-	0.5	-
Output Side Mode Suppression Ratio (SMSR)	dB	20	-	-
Output Isolation ³	dB	-	30	-
Output Power Stability (15 minutes) ⁴	%	-	±0.5	± 1.0
Output Power Stability (8 hours) ⁴	%	-	±1.0	±2.0
Output Power Adjustable Range	%	0	-	100
Output Power Adjustment Mode		Coarse/Fine Adjustment		
TEC Stability	°C	-	±0.1	±0.2
TEC Operating Range	°C	25	30	35
Operating Voltage	VAC	100	220	240
Electrical Power Consumption ⁵	W	-	-	30
Operating Temperature	°C	0	-	50
Storage Temperature	°C	-40	-	85


Output Fiber Type		HI1060 fiber/PM980 fiber optional Corning HI - 1060 6/125um NA=0.13
Output Fiber Length	m	> 1
Output Fiber Connector		FC/APC, other models optional
Dimensions	mm	340(L) × 240(W) × 100(H) Benchtop
		150(L) × 125(W) × 25(H) Module

Technical Specification Notes


1. Output power selectable;
2. Peak operating wavelength customizable;
3. Isolation refers to the isolation against ASE light;
4. Output power stability test conditions: 25°C, tested after a 30-minute warm-up;
5. Maximum power consumption refers to the overall power consumption under extreme operating conditions.




Spectrum Graph

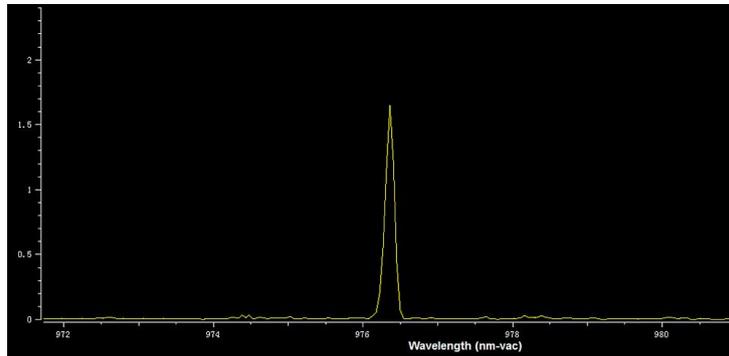

Wavelength Stability Test

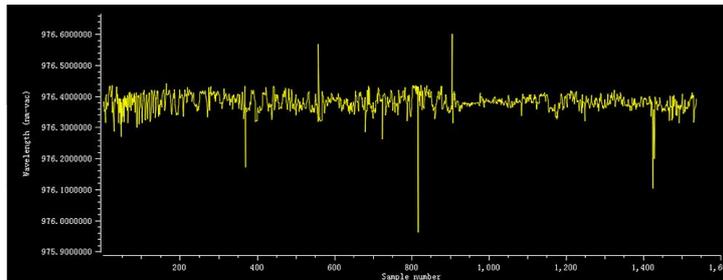


Beam Quality

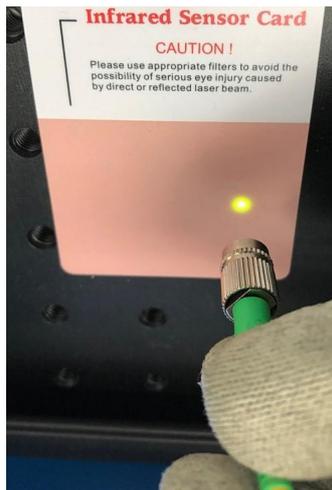



Power Test Table

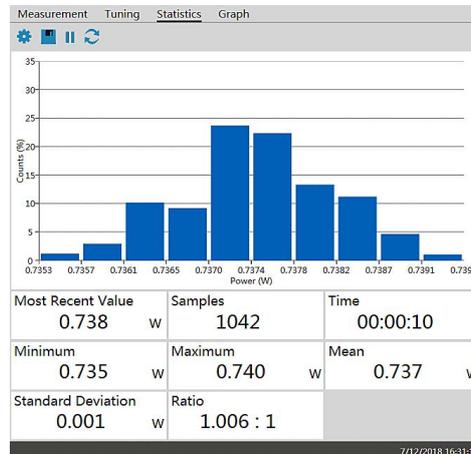

Order Information

MP-FP-980-OPP-PG-ISO-SA

OPP (Output Power): Output power, unit mW , For example: 300-300mW, 800-800mW.

PG: Package type, **B:** Benchtop **M:** Module

ISO: Built-in 980nm pump isolator protection 0-None, 1-Pump protection