

5.26 μ m low-power Benchtop DFB-QCL mid-infrared quantum cascade laser (Benchtop light source)



● Product Description

The QCL5260-5.26 μ m Low Power Benchtop DFB-QCL Mid-Infrared Quantum Cascade Laser is a domestically leading, ultra-low power QCL-DFB laser developed by Idealphotonics in the first half of 2018. It offers a tunable range of over 100 nm and an output power greater than 40 mW, meeting industrial needs such as gas sensing for customer testing. The laser provides collimated output with stable power and superior temperature and

wavelength stability, surpassing the stability of traditional high-power quantum cascade lasers by several orders of magnitude. This makes it an excellent test source for our mid-infrared testing customers.

● Product features

Low power, high power 、 High side-mode suppression ratio 、 Software intelligent control 、 Compact size

● Part Number

MP-QCL-5260-DFB-10-B

● Application area


TDLAS NO system measurement setup 、 Mid-infrared system light source 、 Mid-infrared device analysis

● Core parameters


| Peak Wavelength | Spectral Width | Output Power | Laser Type |
|-----------------|----------------|--------------|------------|
| 5.26 μ m | 3MHz | 10mW | QCL-DFB |



● General Parameters

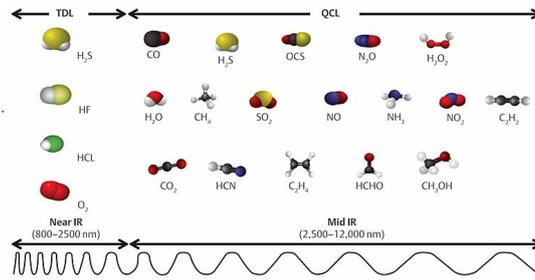

No jump mode scanning interval

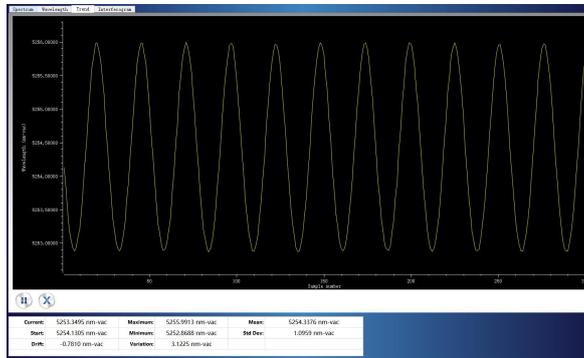

Parameters

| Parameters | Unit | Technical Specification | | |
|---|------|-------------------------|------|------|
| | | Min. | Typ. | Max. |
| Laser collimated output power | mW | | 10 | |
| Peak operating wavelength | um | | 5.26 | |
| Spectral width (FWHM) | MHz | | <3 | |
| Output side-mode suppression ratio (SMSR) | dB | 20 | | |
| Output isolation | dB | | 30 | |



| | | | | |
|------------------------------------|-------|---------------------------|-----|-----|
| Wavelength temperature coefficient | nm/°C | | 0.6 | |
| Wavelength current coefficient | nm/mA | | 0.2 | |
| Output power stability (8 hours) | % | | ±1 | ±4 |
| Output power adjustable range | % | 0 | | 100 |
| TEC working range | °C | 0 | | 50 |
| Operating voltage | VAC | 100 | 220 | 240 |
| Operating temperature | °C | 0 | | 55 |
| Storage temperature | °C | -20 | | 65 |
| Specifications dimensions | mm | 290(L)×180(W)× 68(H)mm | | |

Technical specification explanation:


1. Output power is selectable;
2. Peak operating wavelength is selectable;
3. Output power stability test condition is at 25°C, with a 30-minute warm-up after power-on;
4. Maximum power consumption refers to the overall power consumption under extreme operating conditions.




The wavelength chart of the 5.26um DFB-QCL laser.



The wavelength temperature tuning curve of the 5.26um DFB-QCL laser

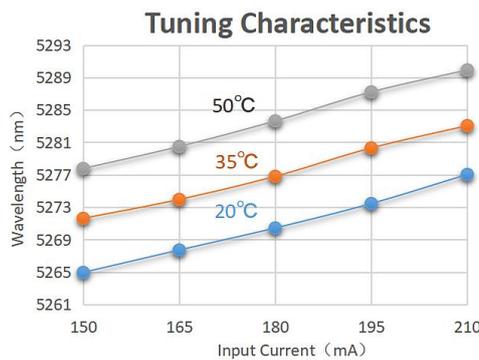


The power stability of the 5.26um DFB-QCL laser

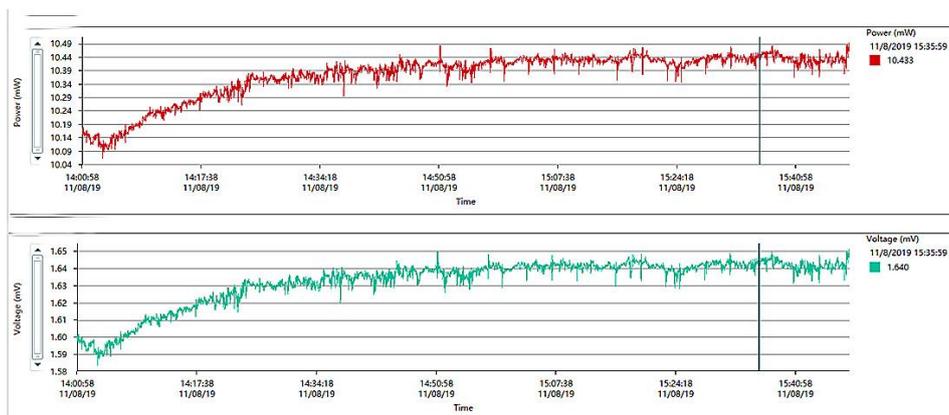


The characteristic curve of the QCL laser (using a typical wavelength of 5.26um)

shows the output power characteristics

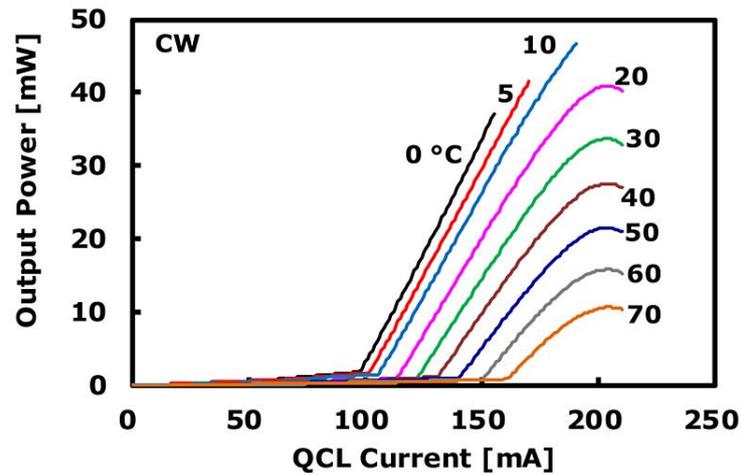


The wavelength-current spectral diagram of the 5.26μm DFB-QCL laser at 25°C

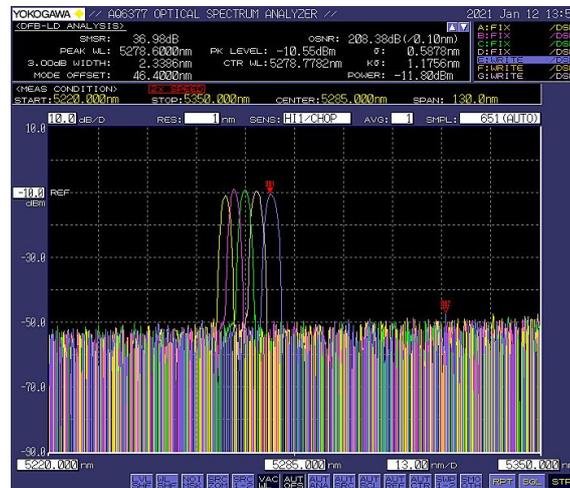

Yellow line: 150mA, 5267.08nm; Red line: 165mA, 5269.48nm; Green line: 180mA,



5271.52nm; Pink line: 195mA, 5274.60nm; Blue line: 210mA, 5278.28nm.

The wavelength-temperature spectrum of the 5.26um DFB-QCL laser at 180mA

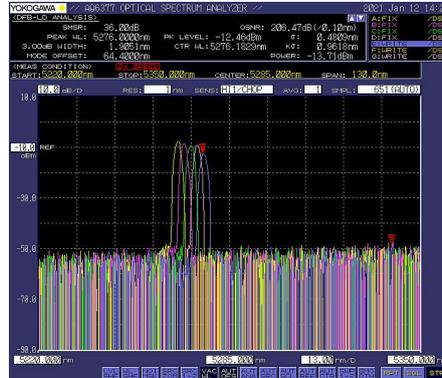


Yellow line: 15°C, 5267.84nm; Red line: 20°C, 5269.20nm; Green line: 25°C, 5272.24nm; Pink line: 30°C, 5274.44nm; Blue line: 35°C, 5275.76nm.

Laser spectrum (continuous) of the laser operating at 10°C

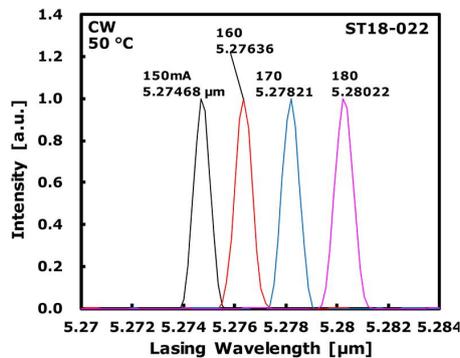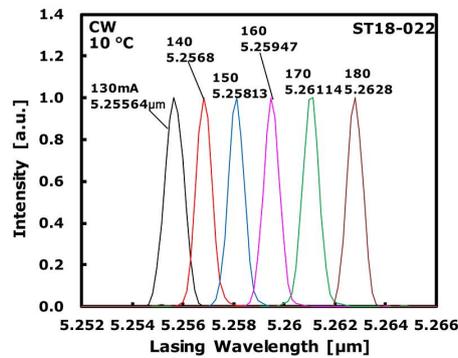




Absorption spectrum simulation curve

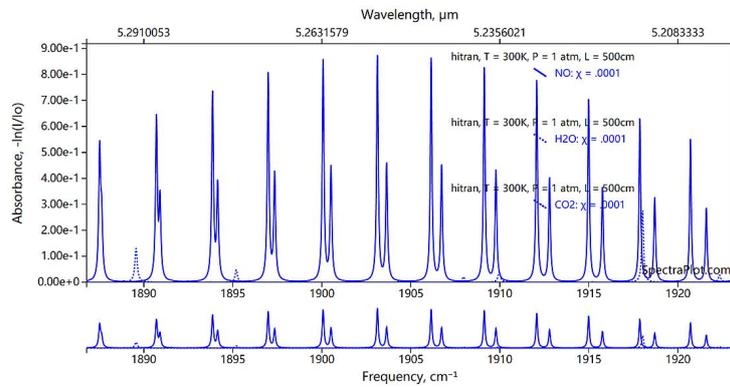


Quantum cascade laser output spot

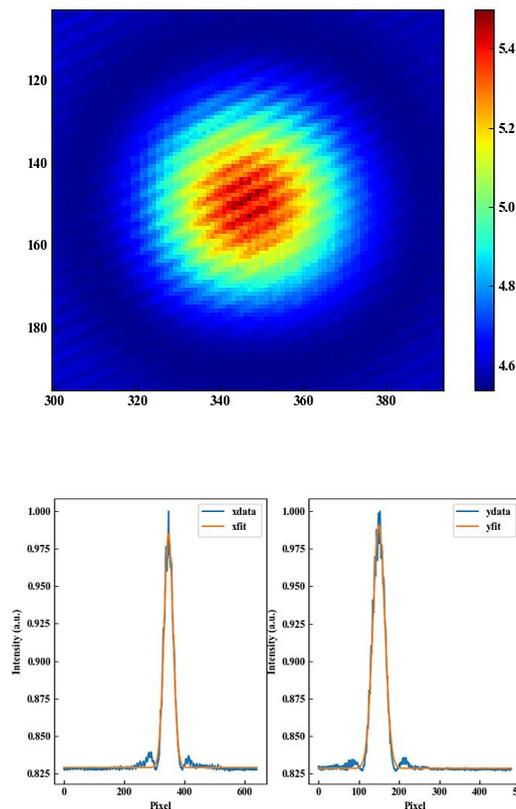

The camera's pixel size is 5 μm , and the Gaussian fit spot diameter is 320 μm



Control software

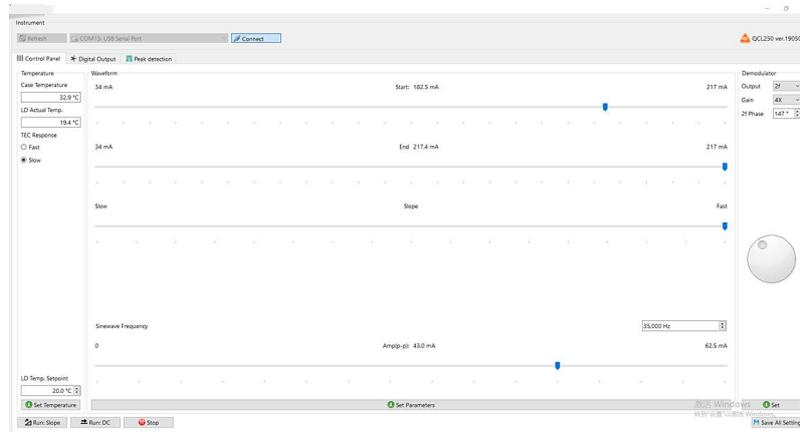

PN#/Ordering info

MP-QCL- W□□□□ -☆-△-XX

W□□□□ : Wavelength

5260: 5260nm

7400: 7400nm

10530: 10530nm

☆: Collimated output

1: With

0: Without

△: Laser type

FP: QCL-FP

DFB: QCL-DFB

XX: Output power



001=1mw

010=10mw

100=100mw

1000=1000mw