

3.39um low power benchtop ICL-DFB tunable continuous light laser (TDLAS integrated control module) 5mW



● Product Description

This is a tunable continuous light laser developed by Idealphotonics. It has a narrow line width, high power, and low power consumption. It can meet the gas sensing test, especially for the test of hydrocarbons and other related gases. In addition, the benchtop ICL-DFB laser module integrates a driver and temperature control module. The temperature and operating current of the tuned laser can also be controlled by software, which can make the laser

work stably and maintain the accuracy of the measured value. FPGA is also added inside the laser module to facilitate the processing of the concentration of the measured gas.

● Product features

Continuous wave、 Single-mode spectrum、 Adjustable light source、 Low power consumption、 High-quality beam、 Narrow line width、 Software intelligent control、 Small structure

● Part Number

MP-ICL-3390-DFB-5-T

● Application area

TDLAS gas system measurement setup、 Mid-infrared system light source、 Mid-infrared device analysis


● Core parameters

Wavelength	Output Power	Spectral Width
3.39um	5mW	3MHz


● General Parameters

Parameters


Parameter	Unit	Specs		
		Min.	Typ.	Max.
Laser Output Power	mW	0.5	5	8
Peak Operating Wavelength	um		3.39	
Spectral Width (FWHM)	MHz		3	
Side Mode Suppression Ratio (SMSR)	dB		20	30
Wavelength Tuning Range	nm	6	10	25
Wavelength Temperature Coefficient	nm/°C		0.32	
Wavelength Current Coefficient	nm/mA		0.06	
Output Power Stability (8h)	%		±1	±4
Output Power Adjustable Range	%	0		100
Operating Current	mA	40	80	140
Threshold Current	mA	25	40	80
Operating Voltage	V	7	9	12
Chip Operating Temperature	°C	-20	10	40
Storage Temperature	°C	15	20	65
Dimensions	mm	340(L) × 240(W) × 100(H)		

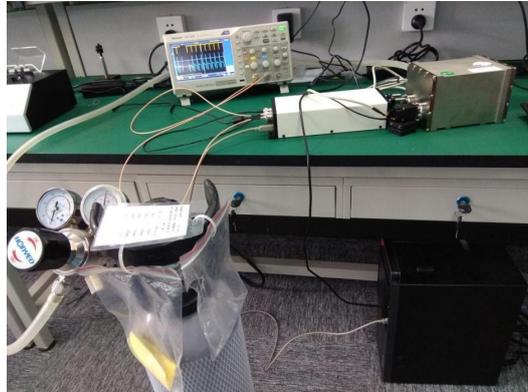

Spectrum (15°C, 80mA)

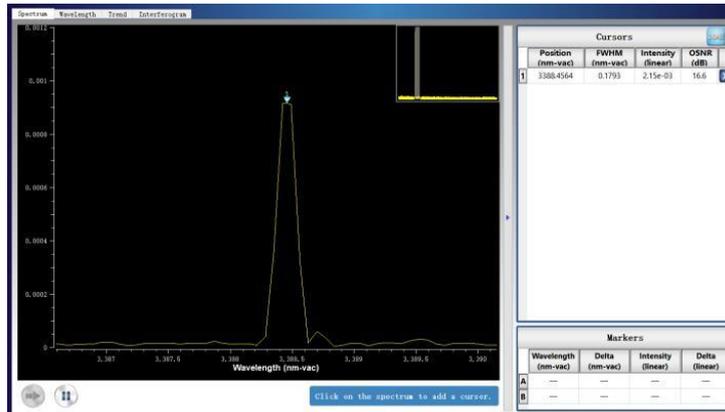


Power Curve (15°C)

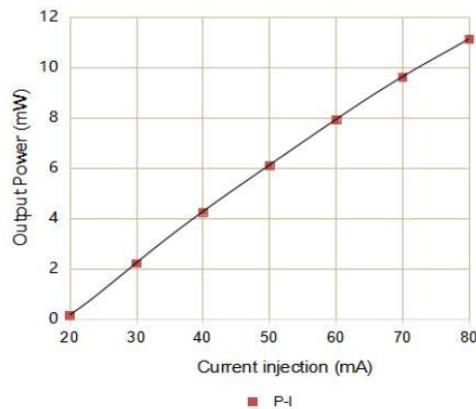


Wavelength Tuning Curve


Tuning Characteristics

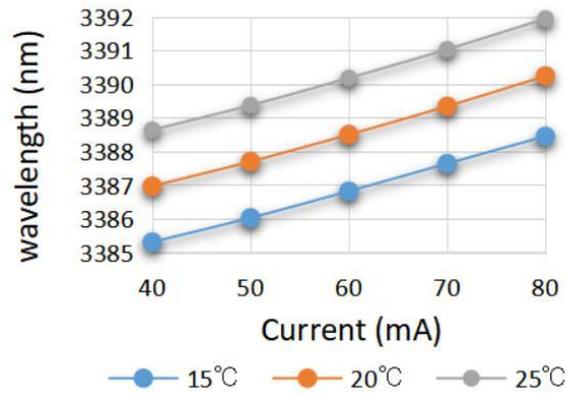

Power Stability (15°C, 80mA)

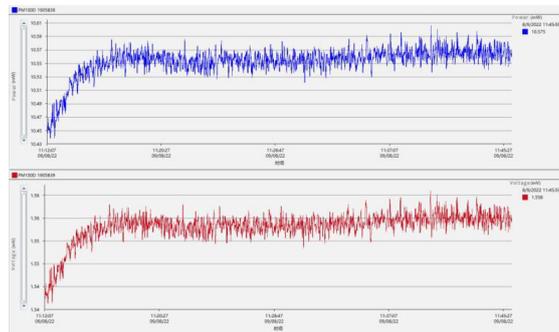


Wavelength Stability (15°C, 80mA)

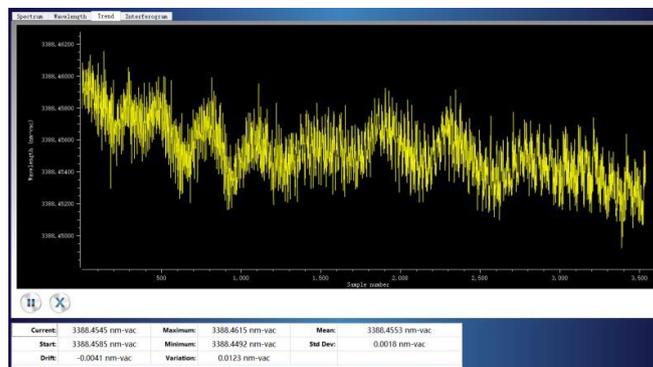





Control Software

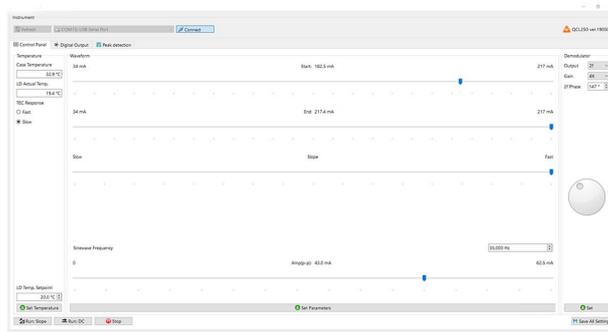

2F Signal Acquisition Interface

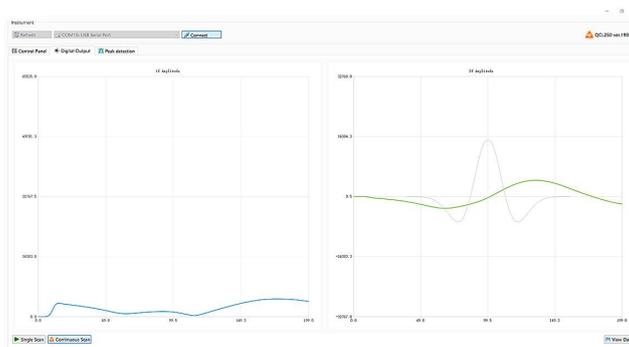


Algorithm Calibration Interface

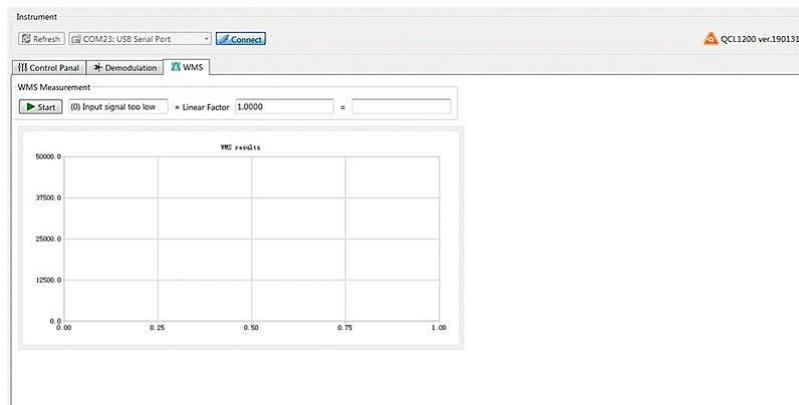



Modulation Signal Linearity Test (Oscilloscope Voltage Signal Effect Diagram)

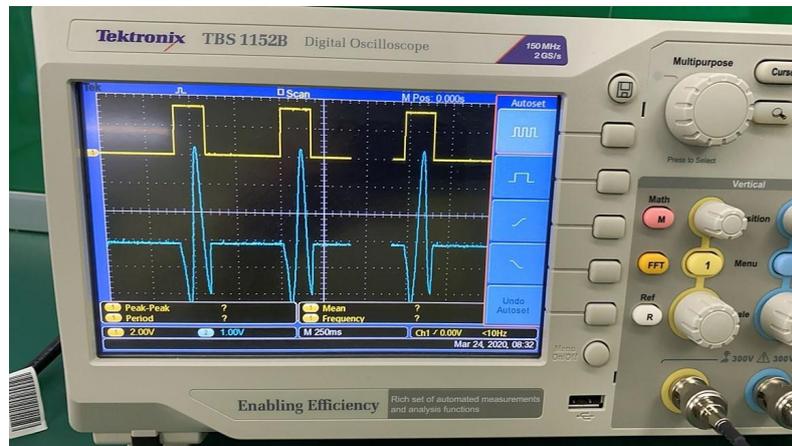

Ordering info

MP-ICL-3390-3-DFB-05

Central Wavelength:

3390: 3.39 μm

Bandwidth:

3: 3MHz

Output Power:

05: 5mW