

# 1550nm narrow linewidth frequency stabilized laser module 2kHz-5kHz polarization maintaining



## ● Product Description

Idealphotonics' narrow linewidth semiconductor laser module has the characteristics of ultra-low RIN noise and ultra-narrow linewidth, and is currently widely used in automotive lidar and fiber optic sensor detection



systems.

- **Product features**

Linewidth: 2kHz -5kHz、 Optical power: 16dBm、 RIN noise: -165dBc/Hz  
@100kHz

- **Part Number**

MP-NL-1550-40-2k-PA-M


- **Application area**

Quantum Communication | Fiber Optic Sensing | Coherent Optical  
Communication | Optical Frequency Standard Transfer | Gravitational Wave  
Detection

- **Core parameters**

Operating wavelength	Lorentz linewidth	Output power
1550nm	2kHz -5kHz	16dBm

## ● Dimension Drawing

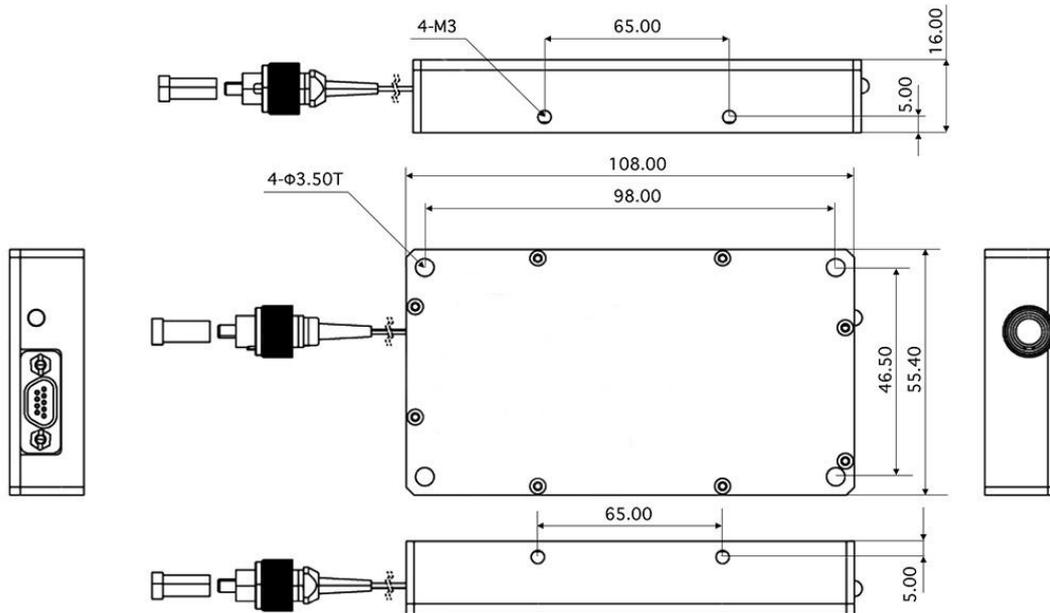

## ● General Parameters


### Specifications

Parameter	Min.	Typical	Max.	Unit	Notes
wavelength	1530	1550	1570	Nm	Customizable
Operating temperature	-10		70	°C	
Output power		16	17	dBm	Customizable
RIN noise		-165	-163	dBc/Hz @100kHz	
Operating current		400	2000	mA	

Operating voltage	4.75	5	5.25	V	
Lorentz linewidth <sup>1</sup>		2	5	KHz	Customizable
Side Mode Suppression Ratio		50		dB	
Output method	Optical fiber output (default)				
Connector type	FC/APC (default)				
Fiber type	SM/PM				

**Note:** The line width test solution is a delayed self-heterodyne beat frequency test

## Pin defination

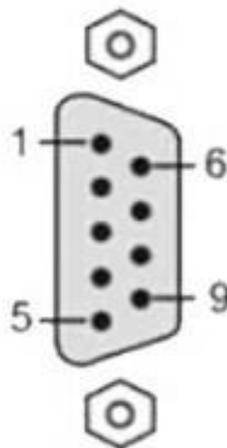



PIN#	Name	Function / specificiaion
1	V <sub>cc</sub>	Input power 5V/3A, low noise
2	Tx(output)	Data output, RS232/3.3 to5V TTL232 (default)
3	Rx(input)	Data input, RS232/3.3 to5V TTL232 (default)
4	Gnd	Ground
5	Gnd	Ground
6	V <sub>cc</sub>	Input power 5V/3A, low noise
7	Mod+(input)	N/A
8	Mod-(input)	N/A
9	Enable(input)	Laser output enable, low level on (default on)

## Ordering information

PL-NLWM-□□□□-☆-▽-XX-XXX

□□□□: Wavelength

530~1565nm ITU-T DWDM,Optional

☆: Output Power

A: 5mW

B: 10mW

C: 20mW

D: 40mw

▽: Modulation Mode

1: DM



**2: CW**

**XX: Fiber and Connector Type**

**SA=SMF-28E+ FC/APC**

**SP=SMF-28E+ FC/PC**

**PP=PM Fiber+ FC/PC**

**PA=PM Fiber+ FC/APC**

**PA=PM Fiber+ FC/APC**

**XXX: Module grade**

**A:<3KHZ,**

**B:<5KHZ,**

**C:<10KHZ,**

**D:<100KHZ**