

# 1064nm Large Aperture Free-Space Optical Isolator



## ● Product Description

The MP-ISO-S-1064-F-S-12-S free-space isolator is available in two types: polarization-dependent and polarization-independent. The polarization-dependent isolator, also known as the Faraday isolator, is composed of three parts: a polarizer, a Faraday rotator, and an analyzer (with its polarization axis at  $45^\circ$  to the polarizer's axis). The polarization-independent isolator typically consists of a birefringent crystal (or polarizer), a Faraday rotator, and a half-wave plate. It is commonly used in fiber lasers and effectively maintains the stability of optical systems. The



isolator uses high-quality magneto-optic crystals, offering characteristics such as low absorption, high extinction ratio, and low loss. It delivers outstanding and reliable performance, with a maximum peak isolation of 45 dB, an aperture of up to 45 mm, and a typical transmission of up to 95%. Customizations are available upon requests.

## ● Product features

Large aperture; high isolation; high power tolerance; low insertion loss; wide temperature stability

## ● Part Number

MP-ISO-S-1064-F-S-12-S


## ● Application area

Laser Precision Processing、 Laser Sensing Systems、 Ultrafast Laser Systems、 OCTSystems、 Laser Detection

## ● Core parameters

Wavelength	Peak Isolation	Optical Power	Clear Aperture
1064nm	>30dB	100W	12mm

## ● Dimension Drawing

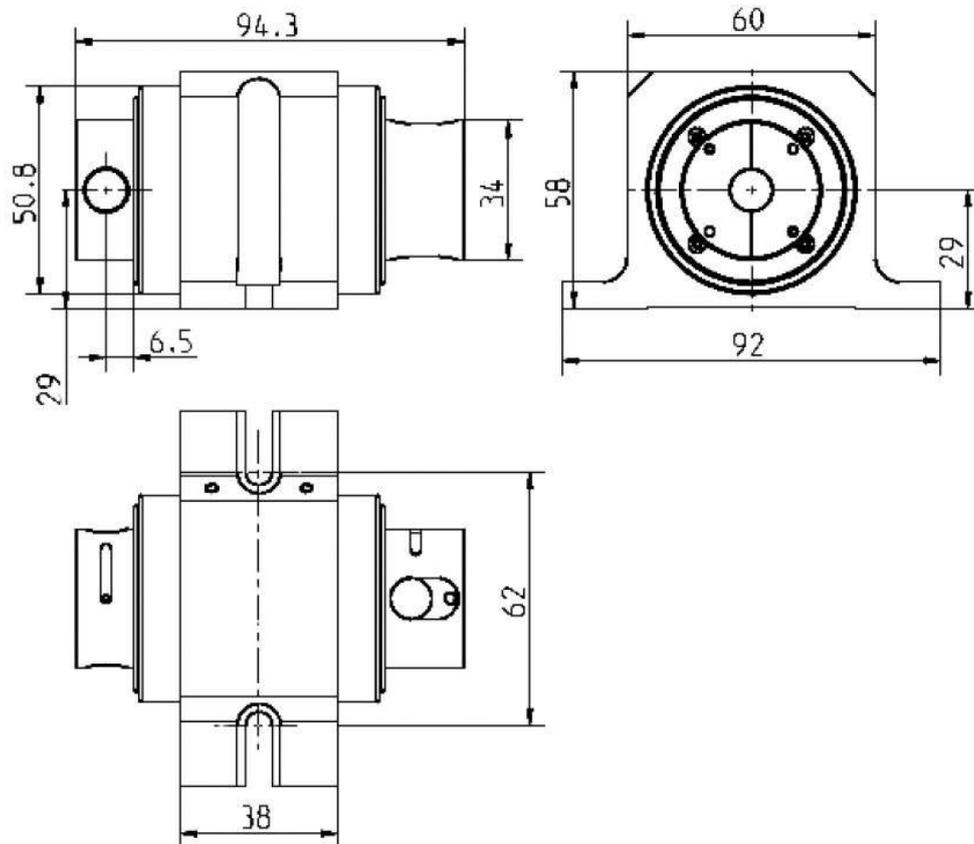

## ● General Parameters

### Model Parameters

1. Specifications	
Wavelength	1064nm ±10nm
Peak Isolation@23°C	>30dB
Transmission	>93%
Optical Power(Average)	100W
Clear Aperture	12mm
Damage Threshold	10J/cm <sup>2</sup> @1064nm, 10ns, 10Hz
Input Polarization	Horizontal
Output Polarization	Horizontal




1. Specifications	
Operating Temperature	10-30°C
Storage Temperature	-10-60°C

## Reliability Test

Test Item	Condition	Frequency	Sampling
High-low temperature cycle test	Temperature -20°C~ 70°C, total time $\geq 24$ hours	1 / batch	/


### Polarization State Reference:

- All models of free-space isolators will non-reciprocally rotate the polarization state by 45° along the polarization plane.
- Additional 1/2 waveplates can be provided upon request to alter the output polarization state.

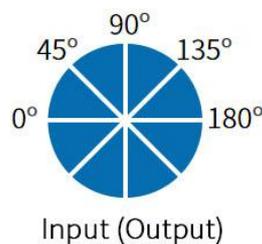


### Polarization-Dependent Isolator Beam Selection:


- Forward Transmission Polarization State Beam (Pi)
- Reverse Transmission Polarization State Beam(Pr)

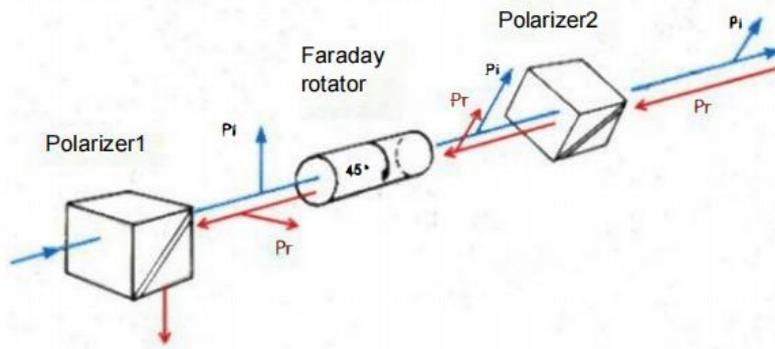

**Typical Isolator Performance**

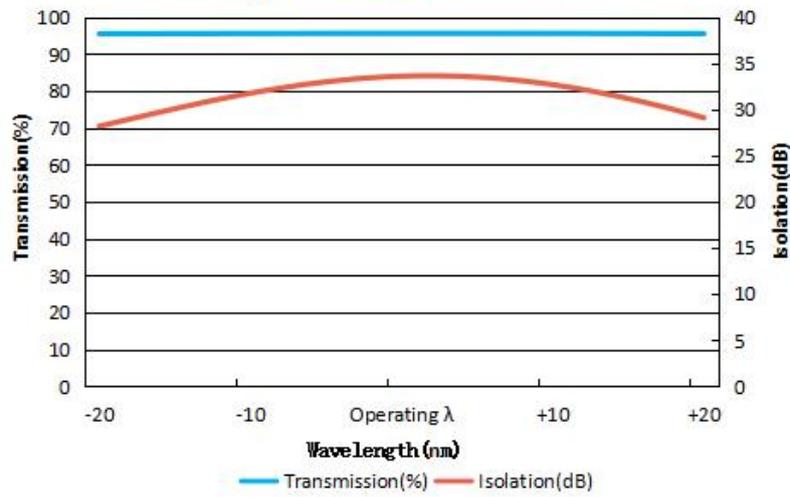

**Typical Isolator Performance**

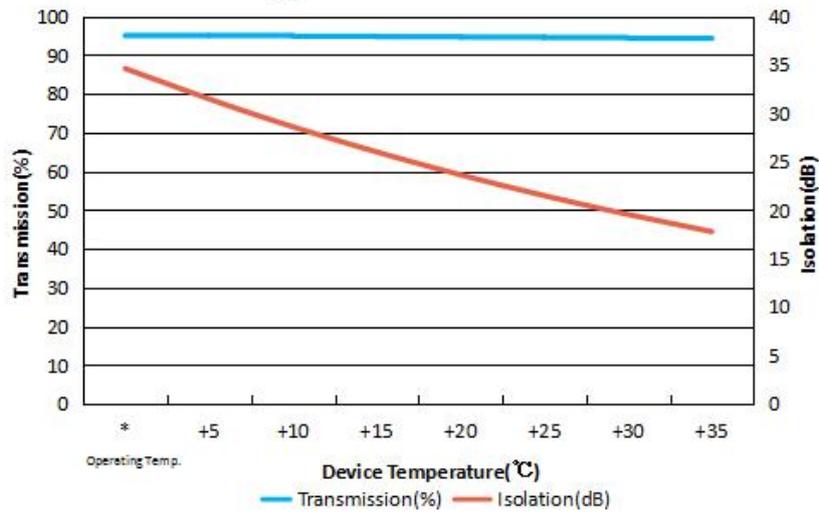



### A04 (Aperture $\leq$ 5mm) package

Type(t)	Power(p)	Aperture(a)	Wavelength( $\lambda$ )	Waveplate(w)	Package(h)
FS (Typical)	1W	2 mm	550-880nm*		A03*
		3 mm	355 nm		
		4 mm	405 nm		
DS (Dual-stage)	5W	5 mm	532 nm	C (Contain)	A06
		8 mm	633 nm		A08
AB (Adjustable bandwidth)	30W	10 mm	780 nm	N (Not Contain)	A23
		12 mm	850 nm		A31
		50 W	...		...
		100 W	...		...
	500W	15 mm	980 nm		...
	...	25 mm	1030 nm		
			1064 nm		



		45 mm			
		...	1319 nm		
			1550 nm		
			2000 nm		
			4500 nm		
			...		

\*Only applicable to the adjustable bandwidth type

\*\*500 W is only applicable under the 1030/1064 nm wavelength condition.

Typical indicator reference				
Aperture Size	Damage Threshold	Power Handling	Transmission	Peak Isolation
2~15 mm	3J/cm <sup>2</sup> at 10ns @(532~980)nm	50W	>93%*, > 90%**	>33 dB*, >45 dB**
2~10 mm	10J/cm <sup>2</sup> at 10ns @(1319~2000)nm	50W	>93%	>33 dB
15~25 mm	10J/cm <sup>2</sup> at 10ns @1030/1064nm	500W	>93%	>33 dB


The operating temperature range for the product is 10°C to 30°C.

\* Only applicable to conventional isolators.


\*\*Only applicable to dual-stage isolators.

### Packaging Dimension Diagram (mm)

#### A04 (Aperture $\leq 5\text{mm}$ )

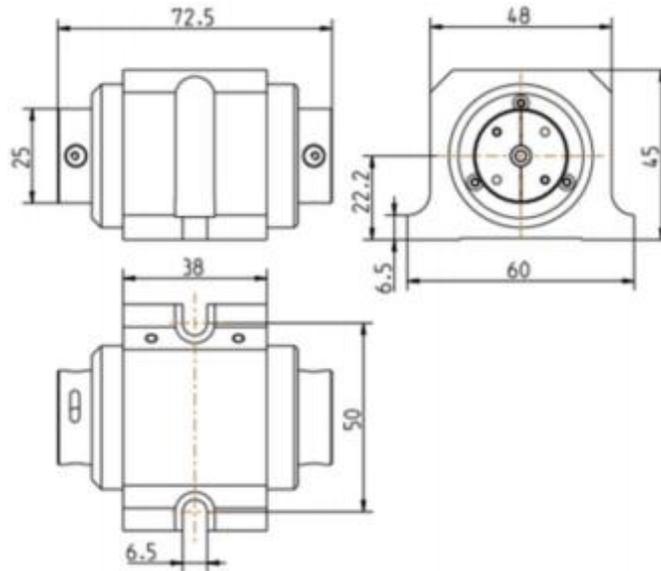

#### A46 (Compact, 1064nm)

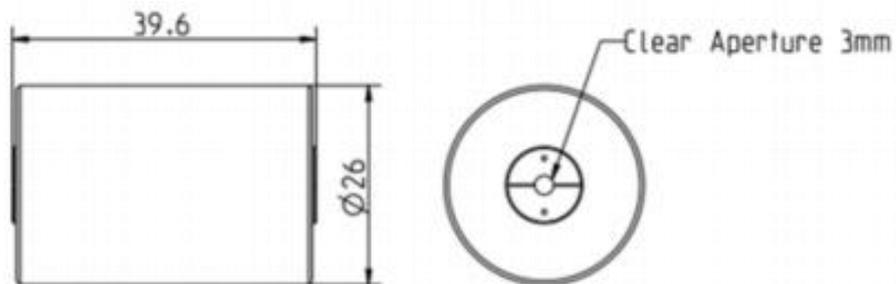

Type(t)	Power(p) )	Apertur e(a)	Waveleng th( $\lambda$ )	Wavelengt h(w)	Waveplate(h)
PI (Polarization-In sensitive)	50W	1.5 mm	980 nm	C	A16 A29
	100W	5 mm	1030 nm	(Contain)	A38 A4
				N	1

	500 W	8 mm	1064 nm	(Not	...
	1000W	...	...	Contain)	
	...				


Typical Specifications Reference				
Aperture	Damage Threshold	Power Handling	Transmission	Peak Isolation
1.5 mm	10J/cm <sup>2</sup> at 10ns @(980~1064)nm	50W	>93%	>33 dB
5 mm	10J/cm <sup>2</sup> at 10ns @(980~1064)nm	100W	>93%	>33 dB
8 mm	10J/cm <sup>2</sup> at 10ns @(980~1064)nm	1000 W	>93%	>33 dB

\* The operating temperature range for the product is 10°C-30°C



Packaging Dimension Diagram (mm)

A16 (Aperture ≤ 5mm)

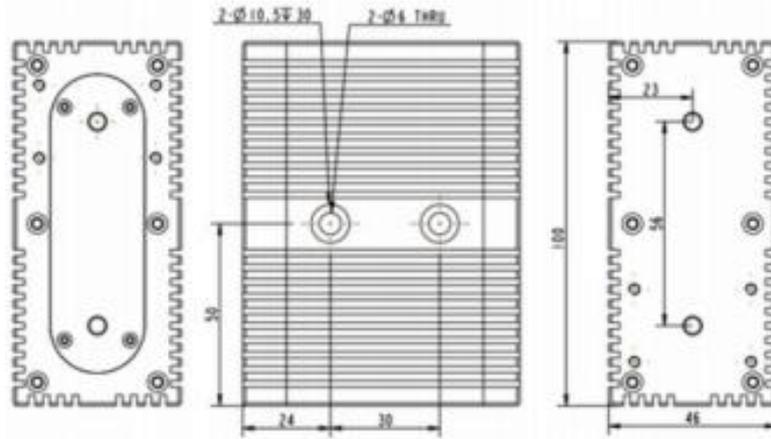

A41(Aperture  $\leq 8$ , water-cool)

