

1:99 2x2 Single Mode Fiber Coupler 1550nm



● Product Description

The single-mode fiber coupler is a coupler for near-infrared band splitting developed and produced by our single-mode fiber fused taper machine IPCS-5000-SMT. It has excellent performance and can cover the entire communication band (1260-1620nm). At the same time, we can provide customers with more cost-effective narrow-band couplers with central wavelengths of 1310nm, 1392nm, 1480nm, 1512nm, 1550nm, 1650nm, 1742nm with a bandwidth of ± 20 nm. The maximum power of our coupler with connector or bare fiber is 500mW. We have 50:50, 75:25, 90:10 or 99:1 coupling ratio couplers for customers. Our 2x2 couplers are based on the



fused taper process, so they are bidirectional, and any port can be used as the input en.

● Product features

Fused fiber couplers for 1260-1620nm、 50:50, 75:25, 90:10, or 99:1 coupling ratios、 Bidirectional coupling (either end can be used as input)、 2.0 mm narrow key FC/PC or FC/APC connectors、 Each broadband coupler comes with its own test report

● Part Number

MP-FBC-1550-A-2-01/99-SA

● Application area

Visible light communication、 Power monitoring、 Optical splitter、 Test equipment

● Core parameters

Wavelength	Port Structure	Coupling Ratio
1260-1620nm	2x2	01:99

● General Parameters

Main Parameters:


Central wavelength	1260-1620nm
Bandwidth	360 nm
Insertion loss	<3.8dB
Return loss	>55dB
Fiber type	SMF-28E
Operating power	500mw
Connector	FC/APC or FC/PC
Operating temperature	-10+70°C
Storage temperature	-45+85°C
PDL	≤ 0.15 dB
Uniformity	≤ 1.0 dB
Dimension	
Package size	3.0mm (Φ) x 60.0mm (L)
Pigtail length	1m
Operate whether charging	No

Note:

1. All test results do not include joints
2. We can accept customization for better parameters or other requirements.

Single point data test 2X2, 50:50, full-band single-mode fiber coupler

(Broadband SLD center wavelength 1550nm, spectrum width: 125nm 15mw single-mode SLD laser test as an example)

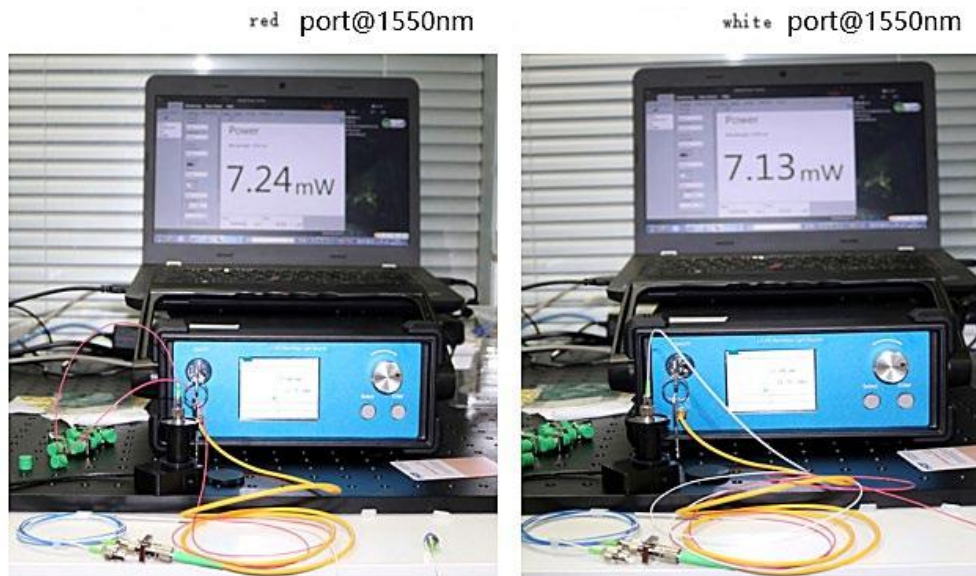

Ordering information

MP-FBC - W□□□□-S○-CR▽-☆-△-XX

W□□□□: Wavelength

1310: 1310nm

1392: 1392nm

1512: 1512nm

1532: 1532nm

1550:1550nm



1650-1650nm

1216:1260-1620nm

1742:1742nm

1950:1950nm

2004:2004nm

S ○ : Port Structure

12: 1x2

22: 2x2

CR▽ :

0199: 1 : 99

1090: 10: 90

2575: 25: 75

5050: 50: 50

☆ : Pigtail Length

05: 0 . 5m

1: 1m

10: 10m

△: Loose Tube



B: Bare Fiber

9 : 900um Loose Tube

20: 2mm Loose Tube

30: 2mm Loose Tube

XX: Fiber and Connector Type

SA=SW-28E+ FC/APC

SP=SW-28E+ FC/PC

PA=PM Fiber+ FC/APC

PP=PM Fiber+ FC/PC