

## 800-1700nm Indium Gallium Arsenide Bias Photodetector, Active area $\Phi 2.0\text{mm}$ , Rise Time 30ns



### ● Product Description

IdealPhotonics' indium gallium arsenide (InGaAs) bias photodetector has a spectral sensitivity range from 500nm to 2600nm, with extremely low noise, fast response, no gain, and low cost. It is suitable for general photodetection applications, offering excellent performance and high cost-effectiveness. The product provides comprehensive technical support and is commonly used in visible and infrared light measurements



## ● Product features

Sensitivity range covers 500nm to 2600nm, commonly used in visible and infrared light measurements、 Bias-type detector, with extremely low noise and fast response, no gain、 Low cost, suitable for general photodetection applications 、 Excellent performance, high cost-effectiveness, and comprehensive technical support、 Customization services are available upon request

## ● Part Number

MP-CPD-M-I-B-C-8J20

## ● Application area


Visible and infrared light measurements

## ● Core parameters

Wavelength Range	Active Area	Bandwidth
800-1700nm	Φ2.0mm	11.7MHz



## ● Dimension Drawing

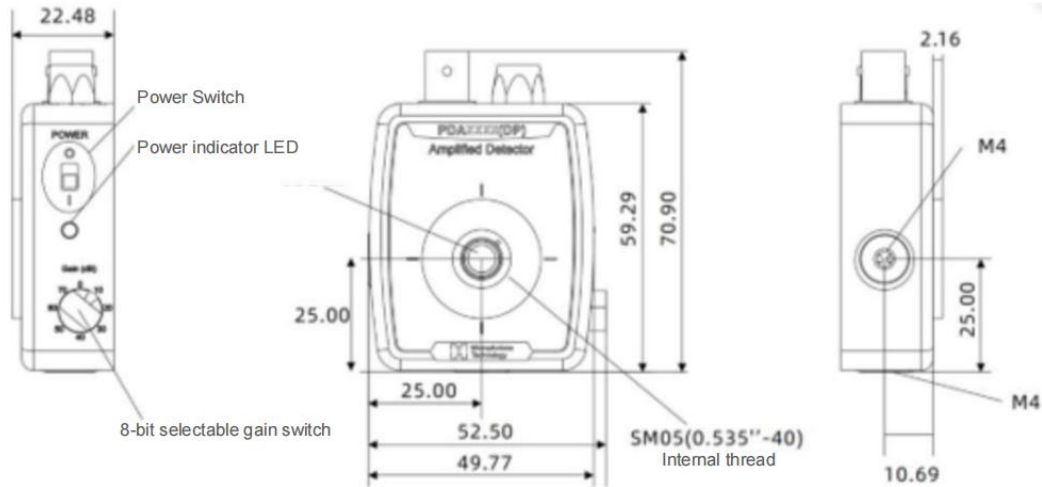

## ● General Parameters

### Main Parameters

Parameter	Value				
	500-1700nm	900-1700nm	800-1700nm	900-2600nm	
Wavelength Range	m	m			
Active area	Φ1.0mm	Φ1.0mm	Φ2.0mm	Φ0.5mm	Φ1.0mm
Bandwidth Range	70MHz	35MHz	11.7MHz	20.6MHz	14MHz
Rise Time (@50Ω)	5ns	10ns	30ns	17ns	25ns
NEP	$2.0 \times 10^{-14}$ W/H z <sup>1/2</sup>	$2.5 \times 10^{-14}$ W/H z <sup>1/2</sup>	$1.3 \times 10^{-13}$ W /H z <sup>1/2</sup>	$1.0 \times 10^{-12}$ W/H z <sup>1/2</sup>	$1.5 \times 10^{-12}$ W/H z <sup>1/2</sup>




<b>Dark Current</b>	1.5nA(Typ.) /10 nA(Max)	1.0nA(Typ.) /25 nA(Max)	55nA(Typ.) /20 0nA(Ma x)	2uA(Typ.)/ 20u A(Max)	5uA(Typ.) /40uA(Ma x)
<b>Junction Capacitance</b>	50pF(Typ.)	80pF(Typ.)	100pF(Typ.)	140pF(Typ .)	500pF(Ty p.)
<b>Bias Voltage</b>	5V		1.8V		
<b>Output Current</b>	0~5mA				
<b>Output Voltage</b>	~9V(Hi-Z); ~170 mV(50Ω)				
<b>Light-Sensitive Depth</b>	0.09" (2.2 mm)				
<b>Operating Temperature</b>	10-50°C				
<b>Storage Temperature</b>	-20-70°C				
<b>Detector Net Weight</b>	0.10kg				
<b>Undervoltage Indicator</b>	Vout ≤9V(Hi-Z) Vout ≤170mV(50Ω)				
<b>Dimensions</b>	2.79" X 1.96" X 0.89" (70.9 mmX49.8 mm X 22.5 mm)				
<b>Power Supply Battery</b>	Power Switch	Signal Interface	Battery Mon itoring	Support Rod	Optic al



				<b>Interface</b>	<b>Interface</b>
<b>A23 , 12VDC, 40mAh</b>	<b>Slide Switch</b>	<b>BNC Female Socket</b>	<b>Instantaneous Button</b>	<b>M4 X 2</b>	<b>SM1 X 1 SM0.5 X 1</b>

### Response Curve:

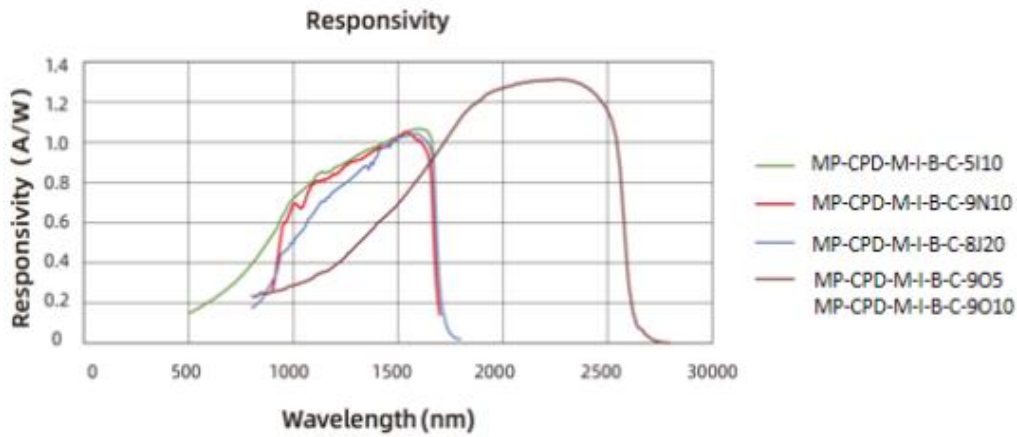

### Product Configurations:



Accessory 1: A23, 12V battery



Accessory 2: BNC-BNC signal cable


**Attachment 1: Optional Configuration Table**

Optional Configuration					
Name	Material	Type	Features	Wavelength Range Light-Sensitive Size	Reserved Optional Configurations
CPD: "Photodetector"	I: InGaAs (Indium Gallium Arsenide)	Bias Type	Conventional Type	5I10: 500-1700nm, $\Phi$ 1.0mm	
				9N10: 900-1700nm, $\Phi$ 1.0mm	
				8J20: 800-1700nm, $\Phi$ 2.0mm	
				9O5 : 900-2600nm, $\Phi$ 0.5mm	
				9O10: 900-2600nm, $\Phi$ 1.0mm	


**Attachment 2: Model and Product Number Correspondence Table**

Model	Specs
MP-CPD-M-I-B-C-5I10	500-1700nm InGaAs biased photodetector, Active area $\Phi$ 1.0mm, rise time 5ns, bandwidth 70MHz
MP-CPD-M-I-B-C-9N10	900-1700nm InGaAs biased photodetector, Active area $\Phi$ 1.0mm, rise time 10ns, bandwidth 35MHz
MP-CPD-M-I-B-C-8J20	800-1700nm InGaAs biased photodetector, Active area $\Phi$ 2.0mm, rise time 30ns, bandwidth 11.7MHz
MP-CPD-M-I-B-C-9O5	900-2600nm InGaAs biased photodetector, Active area $\Phi$ 0.5mm, rise time 17ns, bandwidth 20.6MHz
MP-CPD-M-I-B-C-9O10	900-2600nm InGaAs biased photodetector, Active area $\Phi$ 1.0mm, rise time 25ns, bandwidth 14MHz