


## 400-1100nm Si Avalanche Balanced Detector

### 1GHz

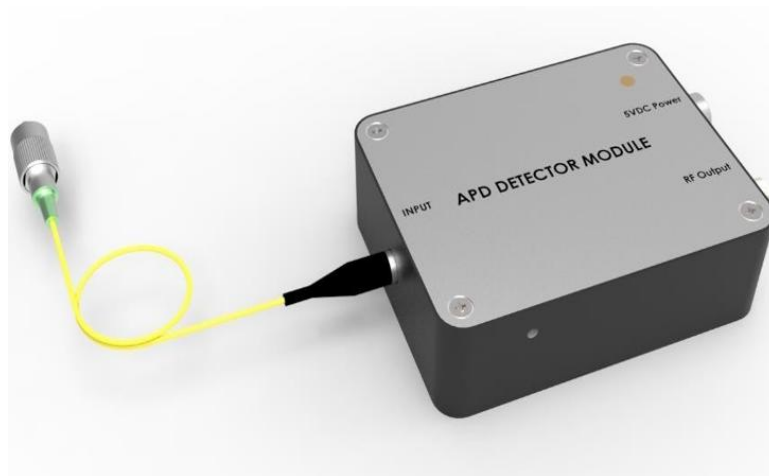

### ● Product Description

The Si avalanche balance detector module integrates a low-noise APD detector, a low-noise broadband transimpedance amplifier, an ultra-low noise isolated power supply, a high-voltage power supply, and APD temperature compensation; the isolated power supply ensures that the output signal is not affected by the external power supply; the APD temperature compensation improves the stability of the detection module.



## ● Product features

Low noise 、 High gain 、 Built-in high voltage power supply 、 APD  
 Temperature Compensation 、 Compact structure 、 Built-in low-noise  
 isolated power supply

## ● Part Number

MP-ABD-M-S-1000-F/S-D/A

## ● Application area

Fiber Optic Sensing、 Fiber Communication、 Laser Distance Measurement、  
 Spectral measurement

## ● Core parameters

Wavelength	Bandwidth	Responsivity
400-1100nm	1GHz	25A/W@850nm

## ● General Parameters

### Product Parameters

Detector Type	Si							
Wavelength	400~1100							nm
Bandwidth	100M	200M	300M	400M	500M	1G	2G	Hz

<b>Detector Responsivity</b>	25	25	25	25	25	25	25	A/W@850 nm
<b>Transimpedance Gain</b>	300K	300K	300K	300K	300K	300K	300K	V/W
<b>Output Impedance</b>	50	50	50	50	50	50	50	$\Omega$
<b>NEP</b>	0.18	0.18	0.18	0.18	0.18	0.18	0.2	pW / $\sqrt{\text{Hz}}$
<b>Output coupling mode</b>	DC/AC	DC/AC	DC/AC	DC/AC	DC	AC	AC	
<b>Supply voltage</b>	5	5	5	5	5	12	12	V
<b>Supply current</b>	0.5(ma x)	0.5(ma x)	0.5(ma x)	0.5(ma x)	0.5(ma x)	0.5(ma x)	0.5(ma x)	A
<b>Optical input</b>	FC/APC (free space optical optional)							
<b>RF Output</b>	SMA							
<b>Dimensions</b>	80*90*25							mm