

FBG Fabry-Perot interferometer fiber Bragg grating 600-2300nm



● Product Description

Fiber Bragg Grating is currently one of the hotspots in the field of fiber optic sensing research. For many applications that require measuring very small temperature or strain changes, using fiber Bragg gratings can improve acoustic sensitivity. The fiber Fabry Perot interferometer is such a pair of fiber Bragg gratings. In this case, a small phase shift can be detected. By coating the optical fibers between gratings with electrical, magnetic, or acoustic enhancement coatings, small changes in these fields can be measured. For sensing purposes and evaluating small vibrations or

acoustic signals through interferometry, using low precision is usually sufficient. Transmission spectra of Fabry Perot cavity. The Fabry Perot fiber interferometer is shown in the figure.

● Product features

Ultra high sensitivity; Scalable functionality; Plug and Play

● Part Number

MP-GTL-FBG-FPI-810-RS

● Application area

Basic Research | Atomic Energy Industry and Aerospace | Optical Communication and Laser Technology

● Core parameters


Wavelength Range	Bandwidth	Reflectivity
600 ~ 2300nm	0.3-0.8nm	5-99.9%

● General Parameters

FBG Characteristics	MP-GTL-FBG-FPI-810-RS	Tolerance/Notes
Wavelength Range nm	600 ~ 2300	± 0.1 ~ ± 1 Customized



Fiber type	SM, PM, Rad resistance	Or Customized
Reflectivity, %	0.5-99	2~5 Customized
Bandwidth (FWHM), nm	0.3-0.8	Customized
Distance between FBGs mm	1-200	Customized
FBG pigtail length m	≥ 0.5	Customized
FBG inscription thought the fiber protective coating	Acrylate, polyimide	Customized
FBG Recoating	Acrylate, polyimide, aluminum, copper	Customized
Tensile Strength, Kpsi	>100	Customized
Optical Connectors	Bare fiber, FC/APC, LC/APC	Customized

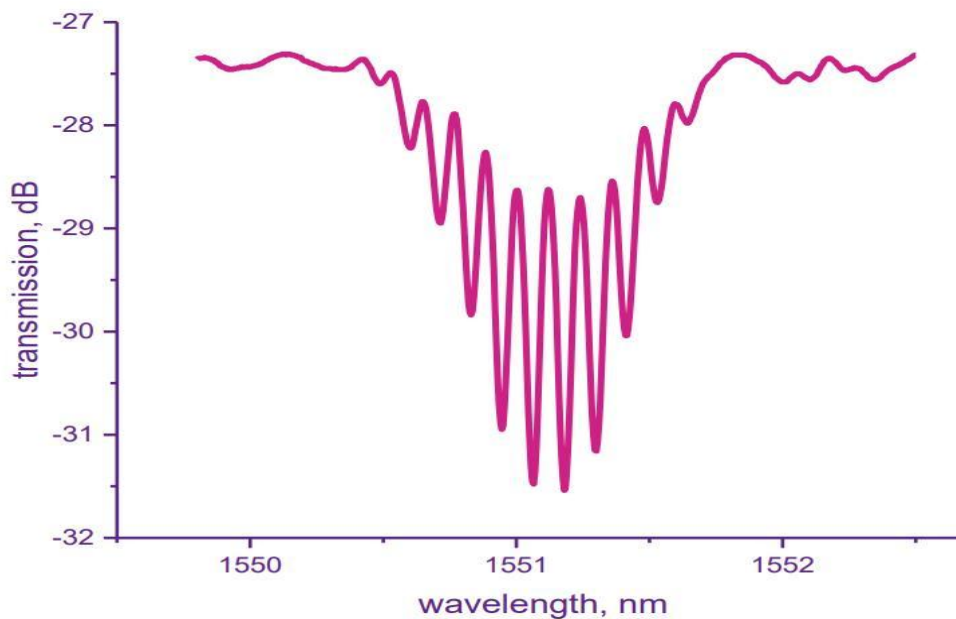

Special application fiber Bragg gratings (FBG) include

Wavelength locker FBG

WDM ITU filter 100/200 GHz FBG

Raman laser FBG

Fabry-Perot interferometer FBG

High-temperature resistant fiber Bragg grating

Radiation-resistant FBG

The application range of the special FBG series:

External reflector for laser diodes

Filtering optical signals

Optical add/drop multiplexers in WDM systems

Measuring minute temperature or strain changes

Evaluating small vibrations or sound signals

Multi-stage Raman lasers

High-temperature applications

Nuclear industry

Aerospace

MP-GTL-FBG-WL-810 Wavelength-Locking Fiber Bragg Grating

Used as an external reflector for laser diodes. With the help of these FBGs, it is

easy to stabilize the wavelength generation of pump semiconductor lasers and single-frequency lasers. Low-reflection gratings with a Full Width at Half Maximum (FWHM) bandwidth of 0.3 nm to 0.8 nm and a reflectivity of 2% to 5% are ideal for stabilizing pump power in lasers. FBGs with a FWHM bandwidth of around 0.1 nm and a reflectivity of 10% to 20% are placed near the semiconductor laser crystal to create single-frequency sources. FORC Photonics offers wavelength-locking FBGs with highly precise wavelength positions (up to ± 0.02 nm).

MP-GTL-FBG-WDM-810 Series WDM ITU Filter 100/200 GHz Fiber Bragg Grating

With narrow spectral bandwidth, this FBG is a good element for filtering optical signals. It is widely used as an optical add/drop multiplexer in WDM systems, allowing for high levels of Side-Lobe Suppression Ratio (SLSR) to prevent adjacent channel crosstalk in the system. These FBGs have a flat-top reflection spectrum and steep spectral drop-offs. The non-thermal encapsulation of these FBGs ensures wavelength stability of < 0.16 nm in the temperature range from 0° C to +70°C, which is essential for stable operation.

MP-GTL-FBG-RL-880 Raman Laser Fiber Bragg Grating

Can be used to create highly efficient multi-stage Raman lasers based on phosphate-silicate fibers at different wavelengths. Compared to germanium-doped fibers, it allows for about three times the Raman shift. For

many applications that require very precise measurements of small temperature or strain variations using acoustic waves, paired FBGs can enhance sensitivity.

MP-GTL-FBG-FPI-810 Fabry-Pérot Interferometer Fiber Bragg Grating

This is a pair of FBGs that can detect very small phase shifts. By applying electrically, magnetically, or acoustically enhanced coatings on the fiber between the gratings, extremely small changes in these fields can be measured. For sensing purposes and to assess small vibrations or acoustic signals through interference measurement methods, a low-finesse Fabry-Pérot cavity is typically sufficient.

MP-GTL-FBG-HE-810 High-Environment Fiber Bragg Grating

These FBGs can be provided as separate or different wavelength FBG chains, enabling multi-point temperature monitoring. Various types of single-mode (SM) fibers and fiber coatings can be used to write these gratings. High-temperature acrylate-coated fibers are suitable for temperatures up to +150°C. Polyimide or metal (copper, aluminum) coated fibers are used for high-temperature applications up to +300°C and +500°C, respectively. With steel tube protection, our high-environment FBGs can be used at temperatures up to +700°C.



MP-GTL-FBG-RH-880 Radiation-Hard Fiber Bragg Grating

Written with radiation-hard pure quartz core fibers, this FBG is well-suited for applications in the nuclear industry, aerospace, and other radiation-intensive environments.

The following configurations can be modified according to customer requirements to customize the fiber Bragg grating solution:

Parameter/PN#	MP-GT L-FBG- WL-81 0	MP-GTL-FBG-WDM -810WDMITU Filter 100/200GHzFBGs	MP-GT L-FBG- RL-880	MP-GTL-FB G-FPI-810F Fabry-Perot Interferometer FBGs	MP-GT L-FBG- HE-81 0	MP-GT L-FBG- RH-88 0
Wavelength Range [nm]	630-2300	1530-1565 (C-band) or Customized 1510-1580	124,01 2,701, 484	600-2300	1000-2300	1000-2300
Quick Order	30 values	-	-	-	30 values	-



Wavelength [nm]	from 633 to 2300				from 633 to 2300	
Fiber Type	SM, PM, Customized	SM, Corning SMF-28	SM, PM, Dual-core, LMA, Customized	SM, PM, Dual-core, Radiation-resistant, Customized	SM, PM, Dual-core, LMA, Customized	SM, PM, Dual-core, Radiation-resistant, Customized
Reflectivity [%]	2-5, 10-20	10-99, Flat-top typical >99.5	5-99.9	0.5-99		
Bandwidth (FWHM) [nm]	0.3-0.8, 0.1-0.15	100/200GHz on ITU For 100GHz: @-0.5dB > 0.3nm, @-20dB 0.65 nm	0.15-1.2	0.3-0.8	0.15-0.8	0.3-0.5
Distance Between	-	-	-	1-200, Customized	-	-



n FBGs [mm]						
Channel Isolation [dB]	-	-20	-	-	-	-
Insertion Loss [dB]	-	<0.15	-	-	-	-
Cladding Mode Loss [dB]	-	<0.5 (only for cladding mode suppression fiber)	-	-	-	-
Return Loss [dB]	~10	-	~8	-	~8	~8
FBG pigtail length [m]	≥0.5, Customized					
FBG Coating	None, Acrylic	None, Acrylic, Polyimide, Customized	None, Acrylic, Polyimide, Aluminum, Copper, Customized.			



	<p>Polyimide, Aluminum, Copper, Customized</p>					
<p>Tensile Strength [kpsi]</p>	>100	-	>100			
<p>Thermal Wavelength Stability (0°C to +70°C) [nm]</p>	-	<0.16	-	-	-	-
<p>Optical Connector</p>	Bare Fiber, FC/APC, LC/APC, Customized					
<p>Dimensions</p>	-	66×18×12	-	-	-	-



onsLxW						
xH[mm]						