

# FBG WDM ITU Filter 100200GHz Wavelength Division Multiplexing Fiber Bragg Grating



## ● Product Description

FBGs with narrow spectral bandwidth are excellent components for filtering optical signals. This type of FBG is widely used as an optical add/drop multiplexer in WDM systems. Allow high-level SLSR to avoid adjacent channel crosstalk in the system. The flat top reflection spectrum and steep spectral drop are characteristics of these FBGs. Stable operation requires non thermal encapsulated FBGs with wavelength stability  $< 0.16$  nm within the temperature range of 0-70 °C



- **Product features**

Low insertion loss; High channel isolation; Accurate bandwidth control

- **Part Number**

MP-GTL-FBG-WDM-810-RS

- **Application area**

Optical Communication System | Laser Technology | Sensing System

- **Core parameters**


Wavelength Range	Bandwidth	Reflectivity
1530nm-1565nm (C Bands), or Customized  1510nm-1580nm	100/200 GHz	10% to 99%, Flat-top  typical > 99.5%

- **General Parameters**

FBG Characteristics	MP-GTL-FBG-WDM-810	Tolerance/Notes
Wavelength  Range nm	1530nm-1565nm (C Bands),  or Customized 1510nm-1580nm	$\pm 0.1$
Fiber type	Corning SMF-28	Customized
Reflectivity, %	1C	2 ÷ 5



<b>Bandwidth (FWHM), nm</b>	100/200 GHz on ITU. For 100GHz: at level -0.5 dB > 0.3 nm and at -20 dB is  0.65 nm	<b>Customized</b>
<b>Channel spacing, dB</b>	>20	
<b>Insertion loss, dB</b>	<0.15	
<b>Cladding mode loss, dB</b>	< 0.5 (for cladding mode suppression fiber only)	<b>Customized</b>
<b>FBG pigtail length</b>	≥ 0.5	<b>Customized</b>
<b>FBG Recoating</b>	None, acrylate, polyimide	<b>Customized</b>
<b>Thermal wavelength stability (0 ÷ +70 C), nm</b>	< 0.16	
<b>Fiber connector</b>	Bare fiber, FC/APC, LC/APC	<b>Customized</b>
<b>Thermal package, mm</b>	66mm x 18mm x 12mm	

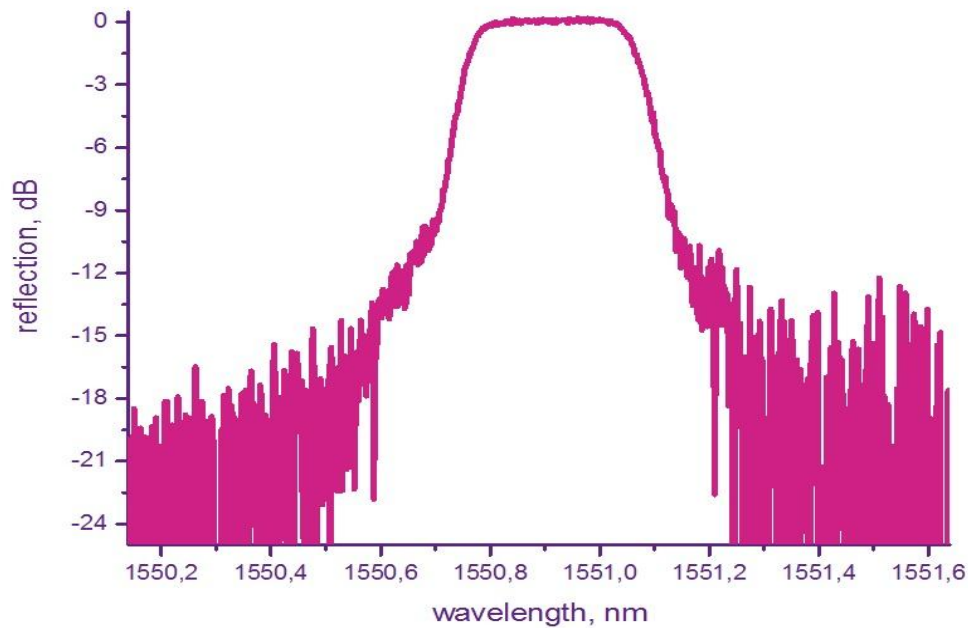

## Special application fiber Bragg gratings (FBG) include

Wavelength locker FBG

WDM ITU filter 100/200 GHz FBG

Raman laser FBG

Fabry-Perot interferometer FBG

High-temperature resistant fiber Bragg grating

Radiation-resistant FBG

## The application range of the special FBG series:

External reflector for laser diodes

Filtering optical signals

**Optical add/drop multiplexers in WDM systems**

**Measuring minute temperature or strain changes**

**Evaluating small vibrations or sound signals**

**Multi-stage Raman lasers**

**High-temperature applications**

**Nuclear industry**

**Aerospace**

### **MP-GTL-FBG-WL-810 Wavelength-Locking Fiber Bragg Grating**

**Used as an external reflector for laser diodes. With the help of these FBGs, it is easy to stabilize the wavelength generation of pump semiconductor lasers and single-frequency lasers. Low-reflection gratings with a Full Width at Half**

**Maximum (FWHM) bandwidth of 0.3 nm to 0.8 nm and a reflectivity of 2% to 5% are ideal for stabilizing pump power in lasers. FBGs with a FWHM bandwidth of around 0.1 nm and a reflectivity of 10% to 20% are placed near the semiconductor laser crystal to create single-frequency sources. FORC Photonics offers wavelength-locking FBGs with highly precise wavelength positions (up to  $\pm 0.02$  nm).**

### **MP-GTL-FBG-WDM-810 Series WDM ITU Filter 100/200 GHz Fiber Bragg Grating**

**With narrow spectral bandwidth, this FBG is a good element for filtering optical signals. It is widely used as an optical add/drop multiplexer in WDM systems,**

allowing for high levels of Side-Lobe Suppression Ratio (SLSR) to prevent adjacent channel crosstalk in the system. These FBGs have a flat-top reflection spectrum and steep spectral drop-offs. The non-thermal encapsulation of these FBGs ensures wavelength stability of  $<0.16$  nm in the temperature range from  $0^{\circ}$  C to  $+70^{\circ}$  C, which is essential for stable operation.

#### **MP-GTL-FBG-RL-880 Raman Laser Fiber Bragg Grating**

Can be used to create highly efficient multi-stage Raman lasers based on phosphate-silicate fibers at different wavelengths. Compared to germanium-doped fibers, it allows for about three times the Raman shift. For many applications that require very precise measurements of small temperature or strain variations using acoustic waves, paired FBGs can enhance sensitivity.

#### **MP-GTL-FBG-FPI-810 Fabry-Pérot Interferometer Fiber Bragg Grating**

This is a pair of FBGs that can detect very small phase shifts. By applying electrically, magnetically, or acoustically enhanced coatings on the fiber between the gratings, extremely small changes in these fields can be measured. For sensing purposes and to assess small vibrations or acoustic signals through interference measurement methods, a low-finesse Fabry-Pérot cavity is typically sufficient.



### MP-GTL-FBG-HE-810 High-Environment Fiber Bragg Grating

These FBGs can be provided as separate or different wavelength FBG chains, enabling multi-point temperature monitoring. Various types of single-mode (SM) fibers and fiber coatings can be used to write these gratings. High-temperature acrylate-coated fibers are suitable for temperatures up to +150°C. Polyimide or metal (copper, aluminum) coated fibers are used for high-temperature applications up to +300°C and +500°C, respectively. With steel tube protection, our high-environment FBGs can be used at temperatures up to +700°C.

### MP-GTL-FBG-RH-880 Radiation-Hard Fiber Bragg Grating

Written with radiation-hard pure quartz core fibers, this FBG is well-suited for applications in the nuclear industry, aerospace, and other radiation-intensive environments.

The following configurations can be modified according to customer requirements to customize the fiber Bragg grating solution:

Parameter/PN#	MP-GT	MP-GTL-FBG-WDM -810WDMITU Filter	MP-GT	MP-GTL-FB G-FPI-810F abry- Pero t Interferom eter FBGs	MP-GT	MP-GT
	L-FBG- WL-81 0		RL-880		L-FBG- HE-81 0	L-FBG- RH-88 0
	Wavel ength Locker	100/200GHzFBGs	Rama n Lase rFBGs		HardE nviron ment	Radiat ionHar dFBGs



	FBGs				FBGs	
Wavelength Range [nm]	630-2300	1530-1565 (C-band) or Customized 1510-1580	124,012,701,484		600-2300	1000-2300
Quick Order Wavelength [nm]]	30 values from 633 to 2300	-	-	-	30 values from 633 to 2300	-
Fiber Type	SM, PM, Customized	SM, Corning SMF-28	SM, PM, Dual-core, LMA, Customized	SM, PM, Dual-core, Radiation-resistant, Customized	SM, PM, Dual-core, LMA, Customized	SM, PM, Dual-core, Radiation-resistant, Customized
Reflectivity [%]	2-5,10-20	10-99, Flat-top typical >99.5	5-99.9		0.5-99	



Bandwidth (FWHM) [nm]	0.3-0.8	100/200GHz on ITU	0.15-1.2	0.3-0.8	0.15-0.8	0.3-0.5
	,0.1-0.15	For 100GHz:@-0.5dB> 0.3nm, @-20dB 0.65 nm				
Distance Between FBGs [mm]	-	-	-	1-200, Customized	-	-
Channel Isolation [dB]	-	-20	-	-	-	-
Insertion Loss [dB]	-	<0.15	-	-	-	-
Cladding Mode Loss [dB]	-	<0.5 (only for cladding mode suppression fiber)	-	-	-	-
Return Loss [dB]	~10	-	~8	-	~8	~8



]						
FBG pigtail length[m]	$\geq 0.5$ , Customized					
FBG Coating	None, Acrylic, Polyimide, Aluminum, Copper, Customized	None, Acrylic, Polyimide, Customized		None, Acrylic, Polyimide, Aluminum, Copper, Customized.		
Tensile Strength [kpsi]	>100	-	>100			
Thermal Wavelength	-	<0.16	-	-	-	-



<b>Stability</b>  (0° C-+70° C)[nm]						
<b>Optical</b>  <b>Connect</b>  or	<b>Bare Fiber, FC/APC, LC/APC, Customized</b>					
<b>Dimensi</b>  onsLxW  xH[mm]	-	66×18×12	-	-	-	-