


633nm 30mW SM Narrow Linewidth Laser

Diodes

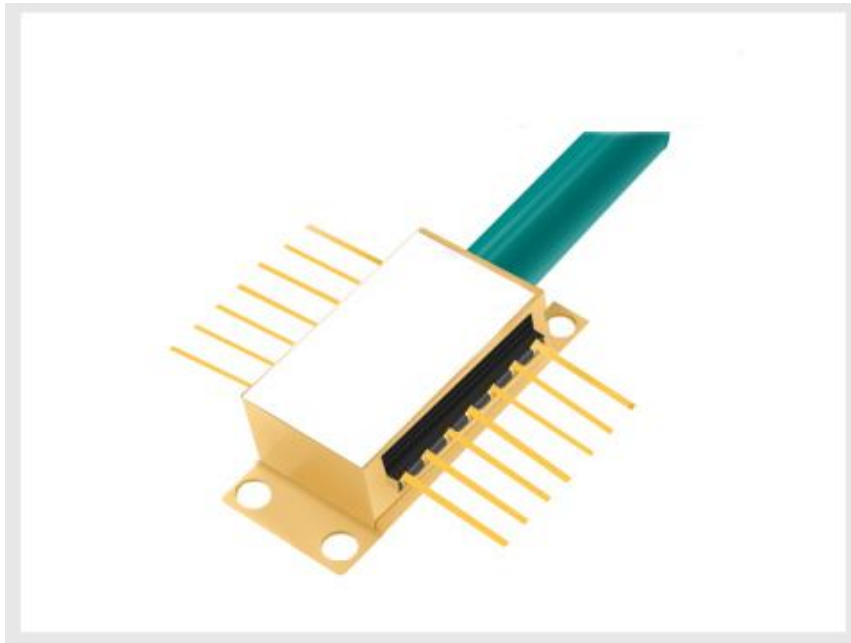

- **Product Description**

Single frequency FBG-stabilized laser diode module designed for optical measurement and communication. The laser is packaged in Butterfly package with monitor photodiode and thermo-electric cooler (TEC). Module is pigtailed with 0.5-0.9 m of single mode or polarization maintaining (optional) fiber and connectorized by FC/APC connector.



● Product features

Optical output: 30mW; Narrow linewidth ($\Delta\nu < 1\text{MHz}$); Wavelength: 633nm
@ 25 °C ; SM or PM Fiber ($\varnothing 0.9\text{mm}$) ; FC-APC connector ; 14-pin butterfly
package; Internal monitor PD and TEC; Low power consumption

● Part Number

MP-NL-0633-B-A81-SA

● Application area

Coherent Optical Communication | High-Precision Fiber Optic Sensing |
LiDAR | Optical Metrology & Spectroscopy | Microwave Photonics

● Core parameters

| Wavelength | Output Power | Fiber Type |
|------------|--------------|------------|
| 633nm | 30mW | SM |



● General Parameters

Optical Characteristics

| Parameter | Symbol | Test condition | Min. | Typ. | Max. | Unit |
|--|--------------------------|--|------|------|------|-----------|
| Optical Power | P_f | CW | 25 | 30 | | mW |
| Pulsed Optical Power | P_{fp} | Pulse, $\tau=10\mu s$, $D=1\%$ | | 40 | | mW |
| Threshold Current | I_{th} | | 50 | 60 | 80 | mA |
| Forward Current | I_f | P_f | | 120 | 150 | mA |
| Pulsed Forward Current | I_{fp} | P_{fp} , $\tau=10\mu s$, $D=1\%$ | | 180 | | mA |
| Forward Voltage | V_f | P_f | | 2.5 | 3 | V |
| Center Wavelength | λ_c | P_f | 632 | 633 | 634 | nm |
| Spectral Width | $\Delta\lambda_c$ | P_f | | | 1 | MHz |
| Side Mode Suppression Ratio | | SMSR | 30 | | | dB |
| Single-Frequency Continuous Tuning Range | Δf | | 1 | | | GHz |
| Current Tuning | $\Delta\lambda/\Delta I$ | | | 0.00 | | nm/ mA |
| Temperature Tuning | $\Delta\lambda/\Delta T$ | | | 0.08 | | nm/ °C |




| | | | | | | |
|-----------------------------|-------|------------------------|-----|----|------|---------|
| Monitor Current | I_m | P_f | 20 | | 500 | μA |
| PD Dark Current | I_d | $V_{rd}=5V$ | | | 0.1 | μA |
| TEC Current | I_t | I_t | | | 1.4 | A |
| TEC Voltage | V_t | TC=70°C | | | 2.7 | V |
| Thermal Resistance | R_0 | T=25°C, B=3900±100K | 9.5 | 10 | 10.5 | kΩ |
| Extinction Ratio (PM fiber) | X_p | P_f | 20 | | | dB |


Absolute maximum ratings:

| Parameter | Symbol | Rating | Unit |
|---------------------------------------|----------|--------|------|
| Forward Current | I_f | 170 | mA |
| Reverse Voltage | V_r | 1.8 | V |
| PD Reserve Voltage | V_{rd} | 7 | V |
| Minimum Operation Case Temperature | T_{ol} | -40 | °C |
| Maximum Operation Case Temperature | T_{oh} | 70 | °C |
| Minimum Storage Temperature | T_{sl} | -40 | °C |
| Maximum Storage Temperature | T_{sh} | 70 | °C |
| TEC Current | I_t | 1.5 | A |

Pin definition

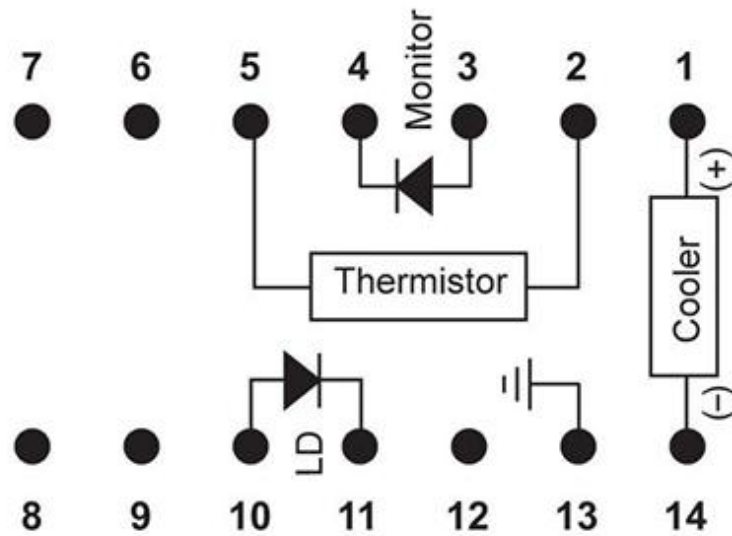


| None PZT Built inside | | | |
|-----------------------|---------------|----|-----------------|
| NO | Parameter | NO | Parameter |
| 1 | Cooler anode+ | 8 | NC |
| 2 | Thermistor | 9 | NC |
| 3 | PD anode- | 10 | LD anode+ |
| 4 | PD cathode+ | 11 | LD cathode- |
| 5 | Thermistor | 12 | NC |
| 6 | NC | 13 | Case |
| 7 | NC | 14 | Cooler cathode- |

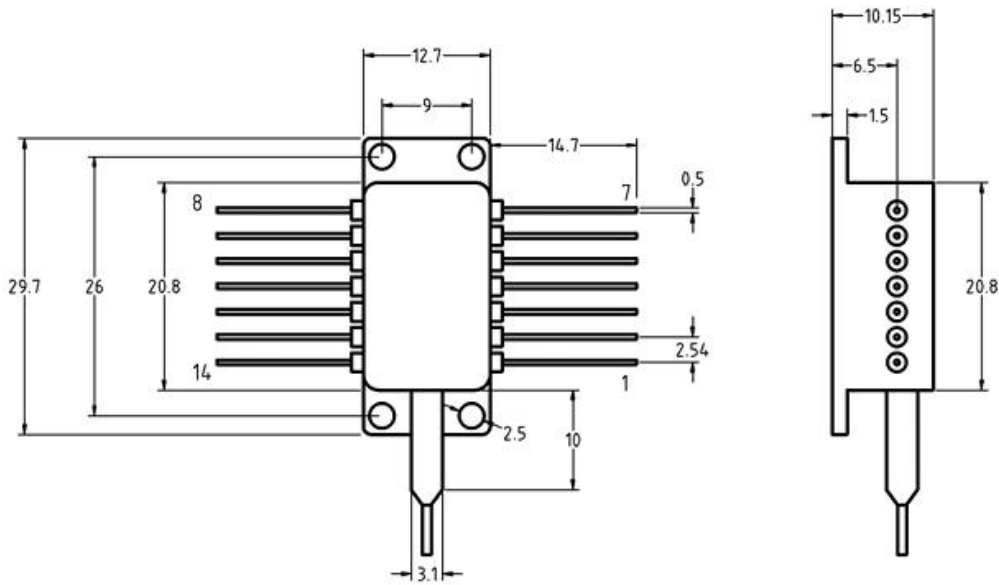

Spectrum




L-I-V Curve

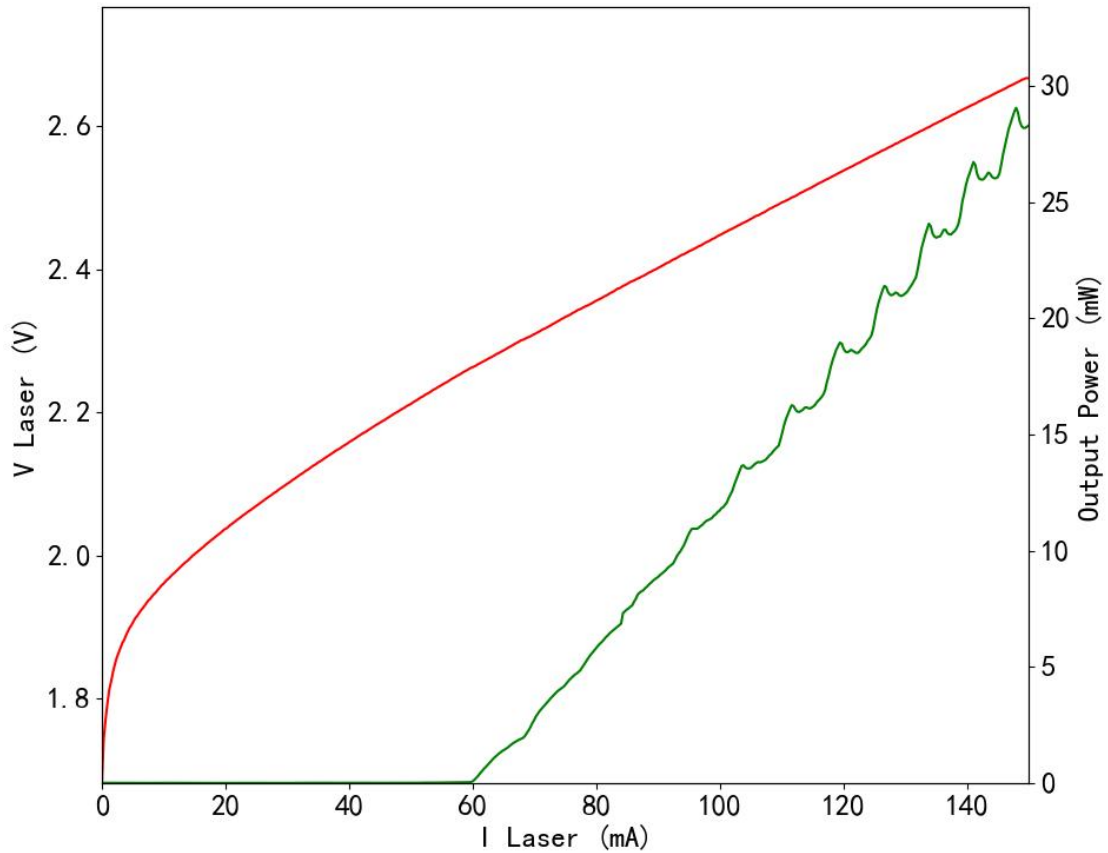

Fiber Pigtail Specifications

| Parameters | Description |
|--------------------------------|-----------------------------|
| Fiber Type | SM600/PM630 fiber |
| Jacket Type | 900µm loose tube |
| Pigtail Length | 1.0±0.1m |
| Connector Type | FC/APC |
| PM fiber Connector Orientation | Please see the right figure |

Polarized light aligned
to the slow axis

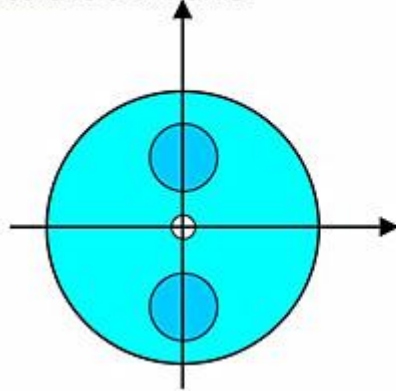

Polarized light aligned
to the fast axis

Note: The PM fiber and the connector key are aligned to the slow axis, fast axis is blocked