


1064nm 10mW SM FBG stabilized Tunable laser diode

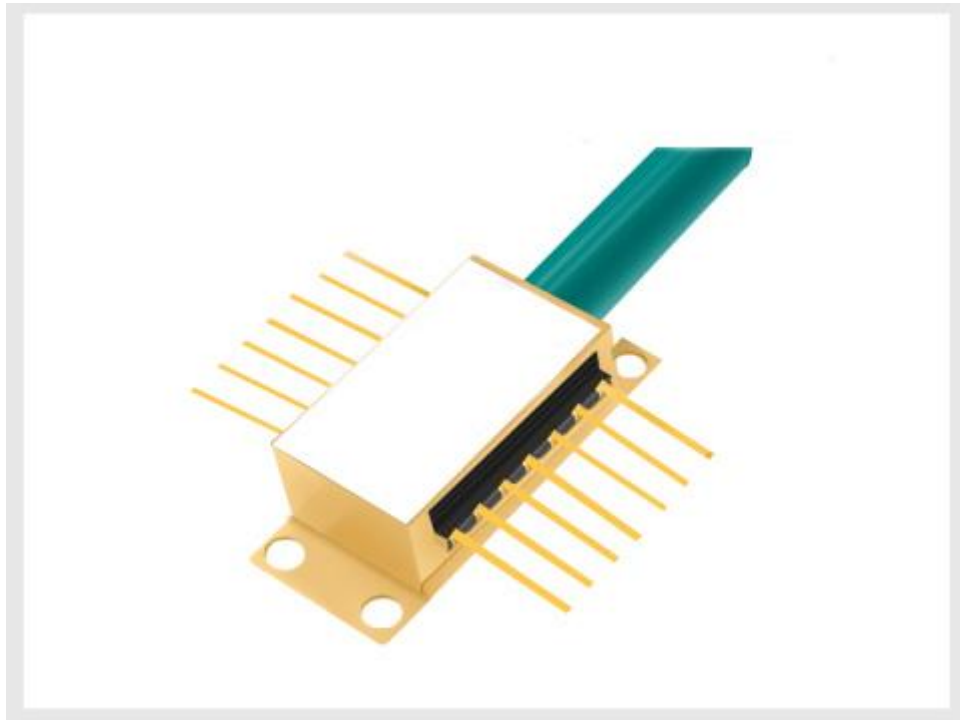

● Product Description

This series Fiber Bragg Grating laser is single frequency laser diode module designed for optical measurement and communication. The laser is packaged in 14-pin standard butterfly package with monitor photodiode and thermo-electric cooler (TEC). The Single-Frequency Continuous Tuning Range: > 1.2 nm by adjust the Mini PZT Built in the laser diode.

● Product features

Optical output: 10mW; Narrow linewidth ($\Delta\nu < 1\text{MHz}$); Wavelength: 1064nm
@ 25 °C ; SMor PMFiber ($\varnothing 0.9\text{mm}$) ; FC-APC connector ; 14-pin butterfly
package; Internal monitor PD and TEC; Low power consumption

● Part Number

MP-NL-1064-A-A81-SA-PZT

● Application area

Laser interference experiment | Drop-side of DWDM long-haul transport
equipment | Optical Test and Instrumentation | Microwave Photonics | CATV
networks | Sensors

● Core parameters

Wavelength	Output Power	Fiber Type
1064nm	10mW	SM

● General Parameters

Optical Characteristics (at 25 °C laser temperature)

Parameter	Symbol	Condition	Min.	Typical	Max.	Unit
Center Wavelength	λ_c	TL=15~35°C CW	1063	1064	1065	nm
Peak Optical Output Power	PO	-	10	-	30	mW
Spectral linewidth	LW	-	-	1	10	MHZ
SMSR	SMSR	CW	40	45	-	dB
Optical Isolation	-	-10<TC<+70°C	30	-	-	dB
PER	ER	-	20	-	-	dB
Relative Intensity Ratio	RIN	CW, output power 10mW	-	-	-145	dB/Hz
Wavelength drift with case(-10 to 70°C) temperature	$\Delta\lambda$	TL=15~35°C	-	-	±30	pm

Electrical Characteristics (at 25 °C laser temperature)

Parameter	Symbol	Condition	Min.	Typical	Max.	Unit
Threshold Current	ITH	-	-	45	65	mA
Slope	η	CW , 10 mW	0.064	0.1	-	mW/mA


Efficiency						
Operating current	I _{op}	CW	-	150	200	mA
TEC set temperature	T _s	-	15	-	35	°C
Laser Forward Voltage	V _F	CW output power 5 mW	-	1.3	1.8	V
Monitor Dark Current	I _D	-	-	-	0.1	μA
Cooler Voltage	V _c	IF=EOL, TC=70°C			2.7	V
Cooler Current	I _c	IF=EOL, TC=70°C	-	-	1.4	A
Thermistor Resistance	R _{TH}	TL = 25 °C	9.5	10	10.5	KΩ
TEC Current	I _{TEC}	TL = 25 °C, TC = 70 °C	-	-	1.8	A
TEC Voltage	V _{TEC}	TL = 25 °C, TC = 70 °C	-	-	3.5	V
Tuning Range	Δf		1		1.5	nm

PZT Tuning						
Voltage	VT		0		150	V
Mode Hop				3		
Free Range	ΔI					mA
Extinction						
Ratio	XP	CW 10 mW	17			dB


Spectrum



Voltage Vs Wavelength(PZT Version)

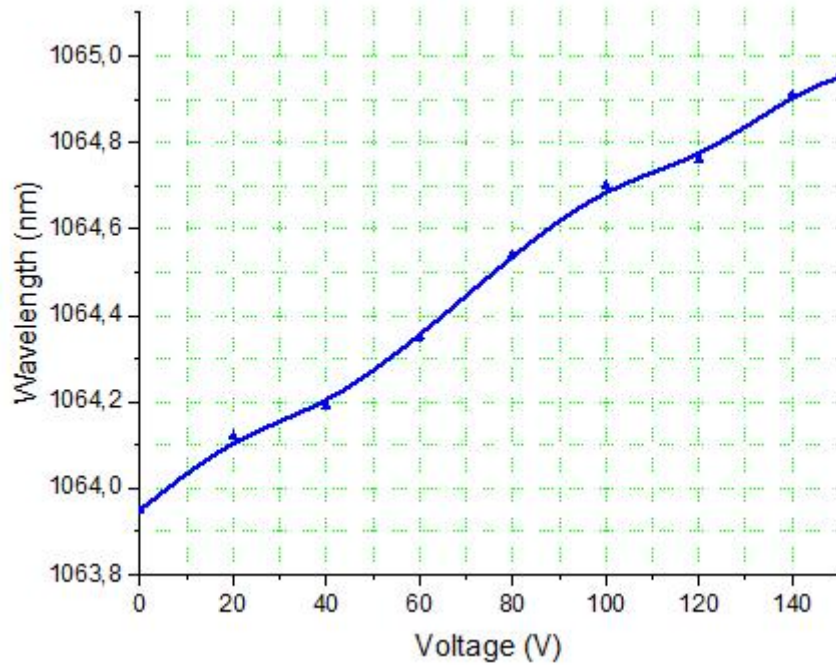


L-I Curve

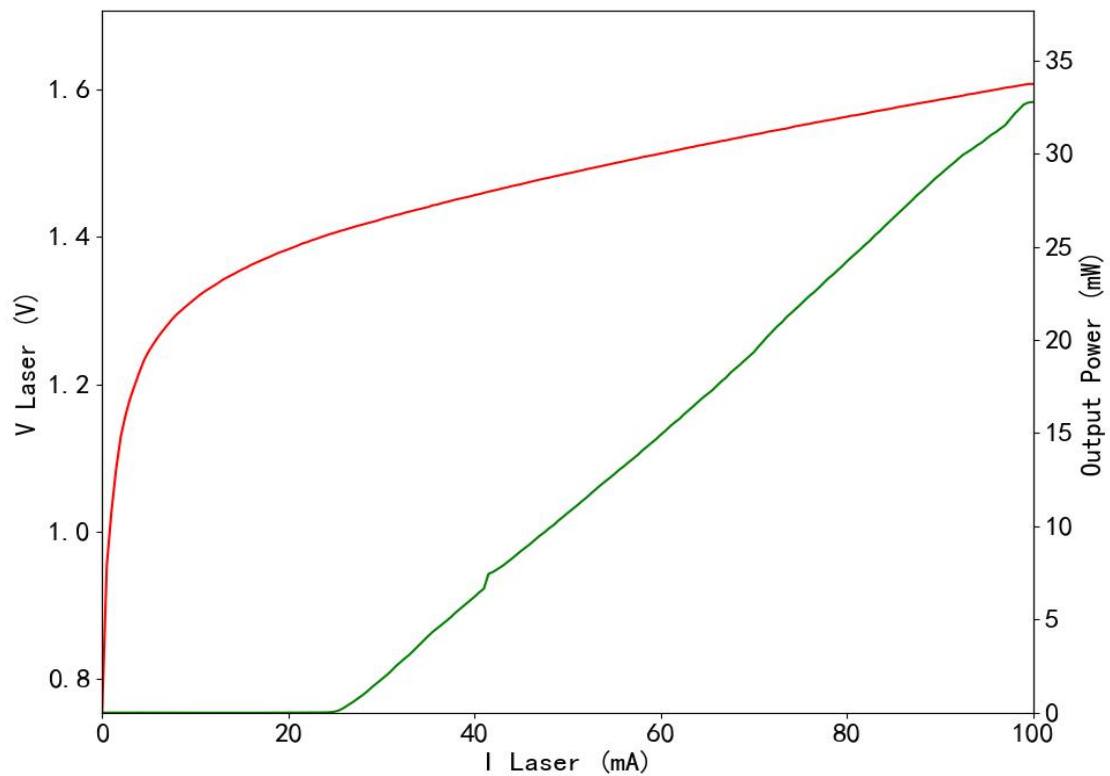





Linewidth Testing Result

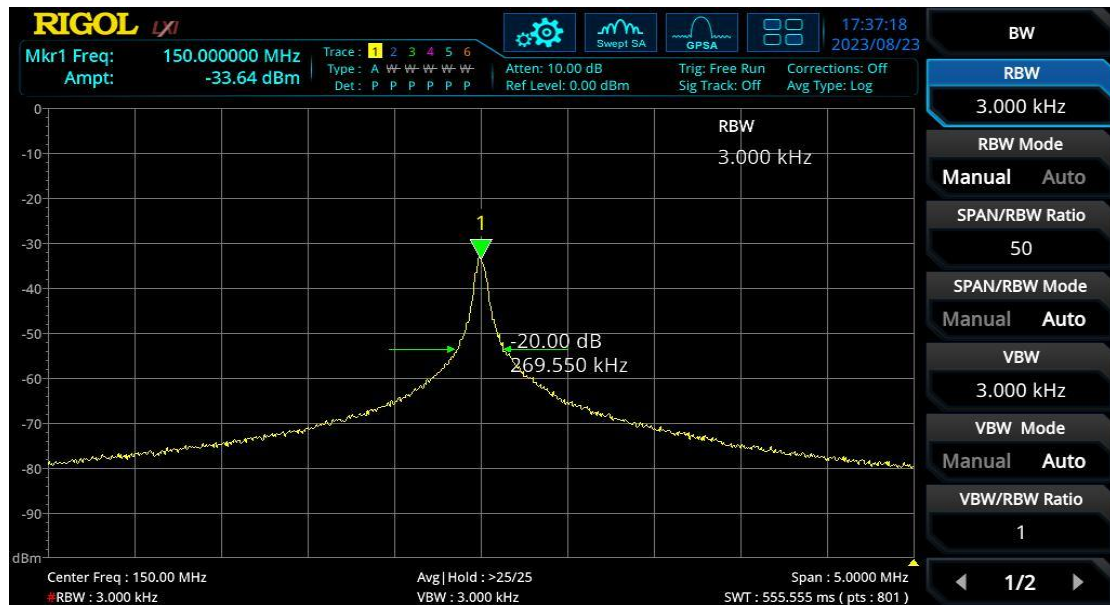

Wavelength Stability

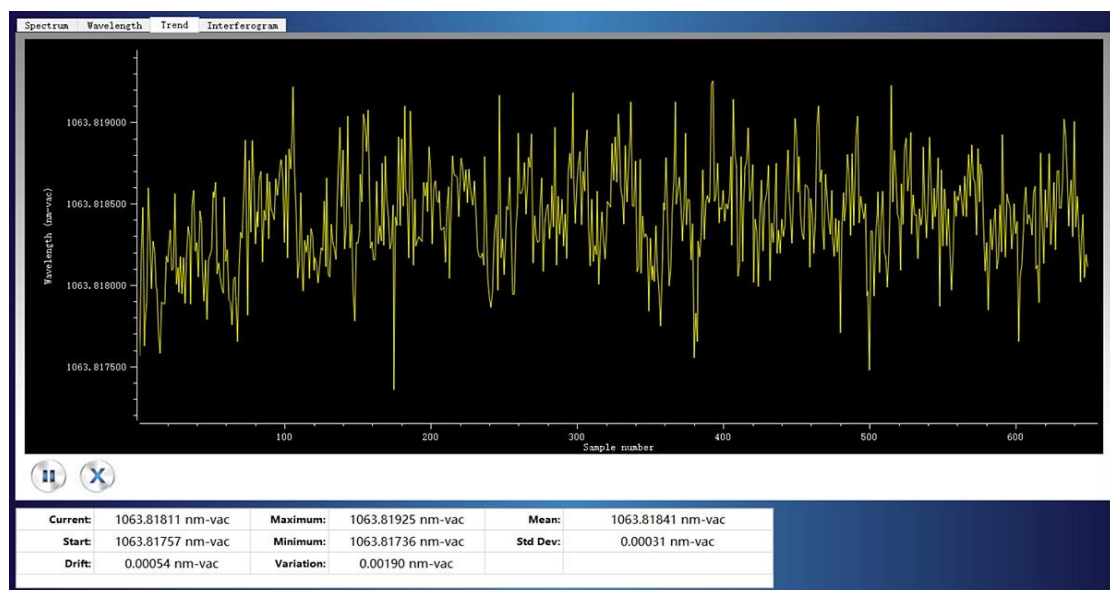


Working Structure

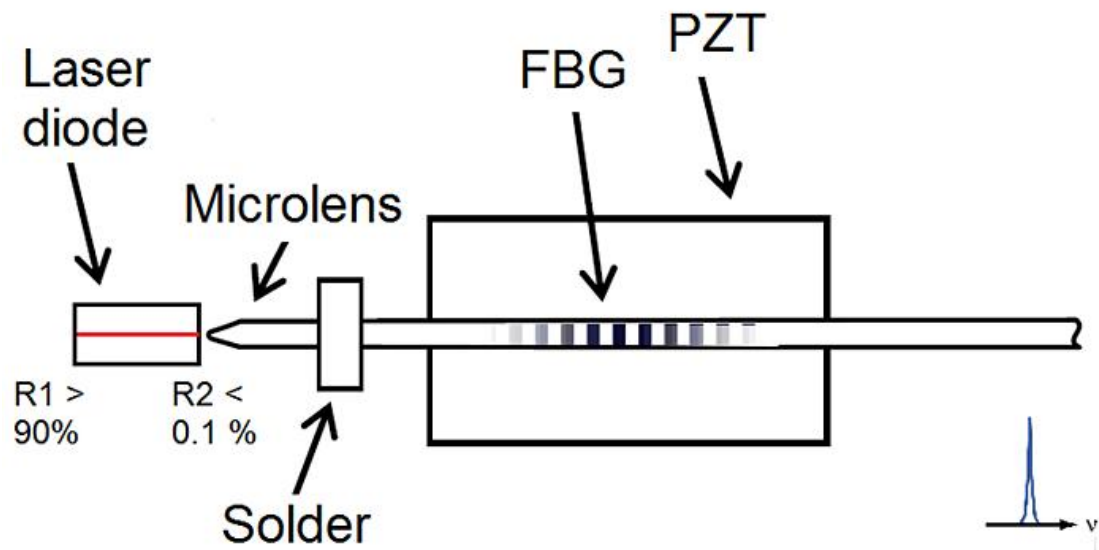


Absolute maximum ratings:

Parameter	Unit	Min	Typ	Max
Case Temperature	°C	-40	25	70
Chip Temperature	°C	+10	25	40
Operating Current	mA	0	150	200
Forward Voltage	V	0.8	1.2	1.8
TEC Current	A	-	1.4	1.8
Reverse Voltage(LD)	V	-	-	1.8

Pin definition

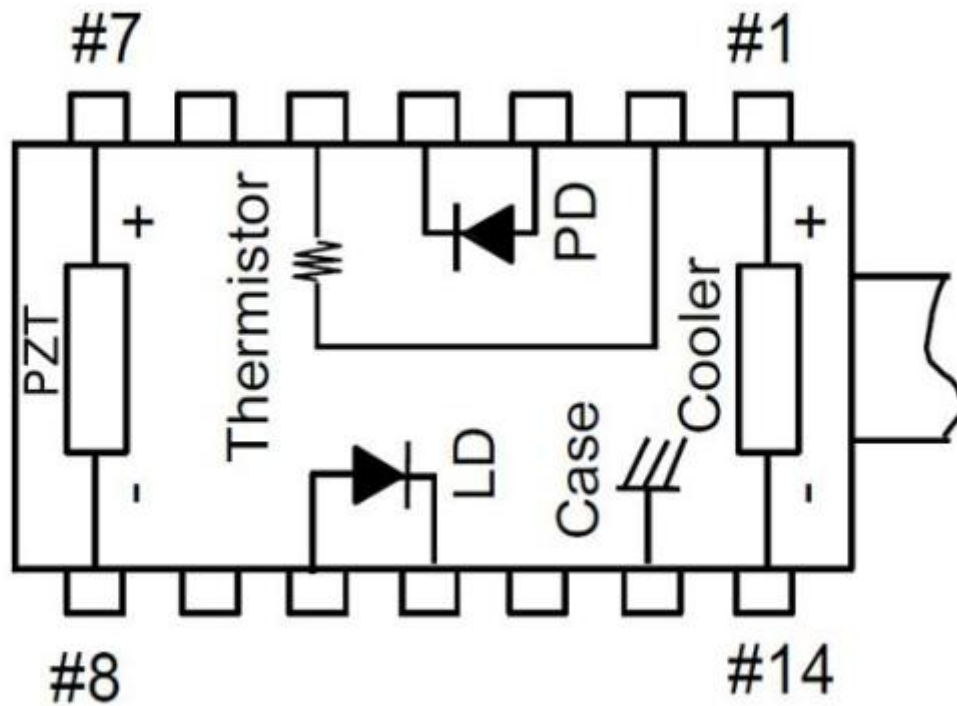


None PZT Built inside			
NO	Parameter	NO	Parameter
1	Cooler anode+	8	PZT tuning -
2	Thermistor	9	NC
3	PD anode-	10	LD anode+
4	PD cathode+	11	LD cathode-
5	Thermistor	12	NC
6	NC	13	Case
7	PZT tuning +	14	Cooler cathode-

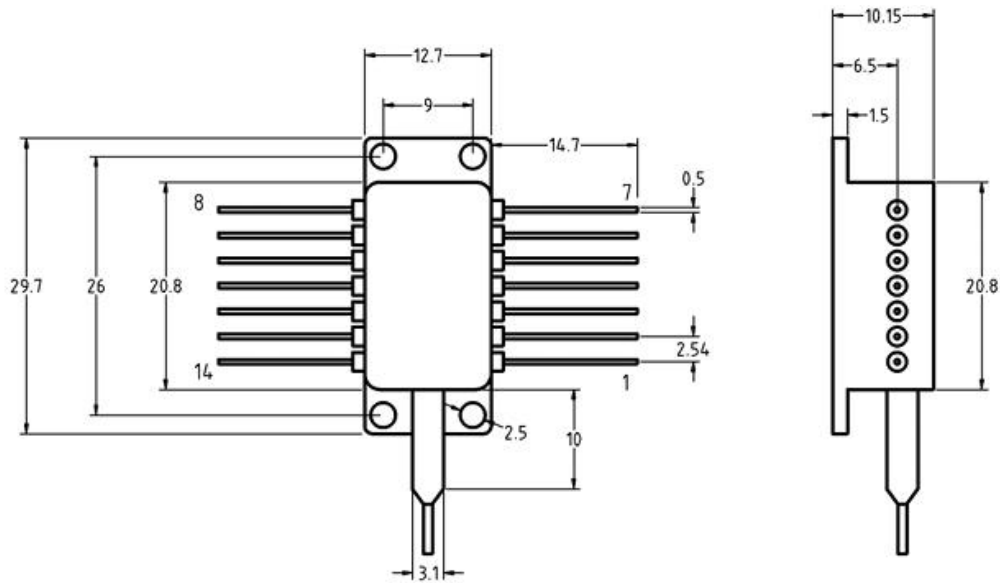

Fiber Pigtail Specifications

Parameters	Description
Fiber Type	SM fiber
Jacket Type	900μm loose tube
Pigtail Length	1.0±0.1m
Connector Type	FC/APC
PM fiber Connector Orientation	Please see the right figure

Polarized light aligned
to the slow axis

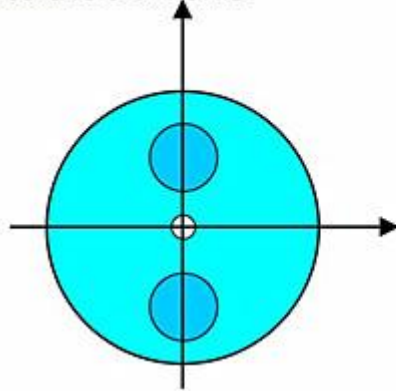

Polarized light aligned
to the fast axis

Note: The PM fiber and the connector key are aligned to the slow axis, fast axis is blocked