


# 1310nm 100mW SM DFB Laser Diode with Isolator



## ● Product Description

Distributed feedback (DFB) and distributed Bragg reflector (DBR) laser diodes are light sources emitting an extremely narrow spectral line with a bandwidth below 5 MHz and typical side mode suppression ratio (SMSR) > 40 dB. GaAs-based DFB and DBR lasers utilize InGaAs quantum well (QW) or InAs/GaAs quantum dot (QD) active regions and proprietary chip designs, covering the spectral range from 970 nm to 1330 nm. To date, DFB and DBR lasers are common laser variants, especially for use in scientific research and operations. Both laser types operate in a single longitudinal mode and

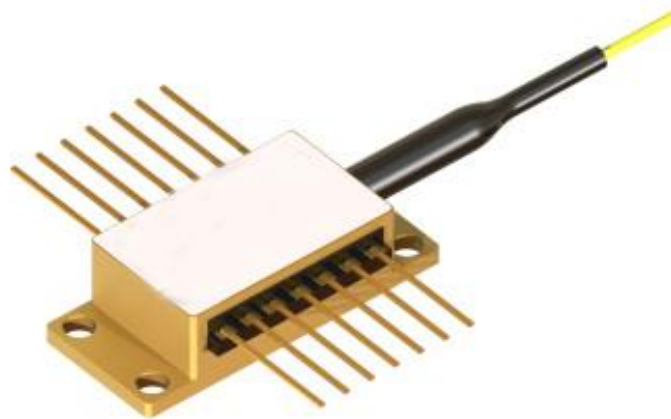

are highly reliable in terms of efficiency, spectral purity, and long-term performance across various applications.

## ● Product features

High stability output; single longitudinal mode narrow linewidth; wavelength stability; low noise performance; compact modular design

## ● Part Number

MP-DFB-1310-100-A81-14BF-SA-ISO

## ● Application area


Coherent Optical Communication | Fiber Optic Sensing | Precision Measurement | Quantum Optics | Scientific Research Instruments

## ● Core parameters

Central Wavelength	Output Power
1310nm	100mW



## ● Dimension Drawing

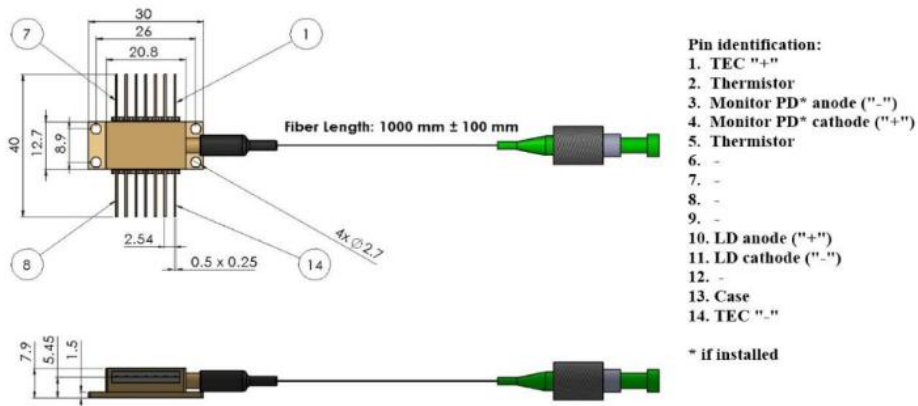

## ● General Parameters

### Specifications

### Recommended Operating Conditions

@ CW, Module mounted on heat sink at room temperature

Parameter	Min.	Typ.	Max.	Unit
Chip Temperature	20	25*	40	°C
Forward Current	—	800	850	mA
Output Power**	20	—	100	mW

\*May vary depending on selected wavelength in some cases

\*\*No kinking over full operating range



## Characteristics

@ CW, 25°C\*, 800 mA


Parameter	Min.	Typ.	Max.	Unit
Output Power @ 1800 mA	100	—	—	mW
Forward Voltage	—	2.6	3.5	V
Threshold Current	—	60	100	mA
Peak Wavelength** (customer selectable)	1300	—	1330	nm
Peak Wavelength Tolerance	—	—	±1	nm
Wavelength Tuning vs. Temperature	—	120	—	pm/°C
Wavelength Tuning vs. Current	—	4	—	pm/mA
Side Mode Suppression Ratio (SMSR)	40	50	—	dB

\*Temperature may vary from 20 to 40°C depending on selected wavelength in


some cases\*\*Achievable within wavelength tolerance at power > 100 mW

# Typical Performance (For Reference Only)


## Light Current Voltage Characteristics

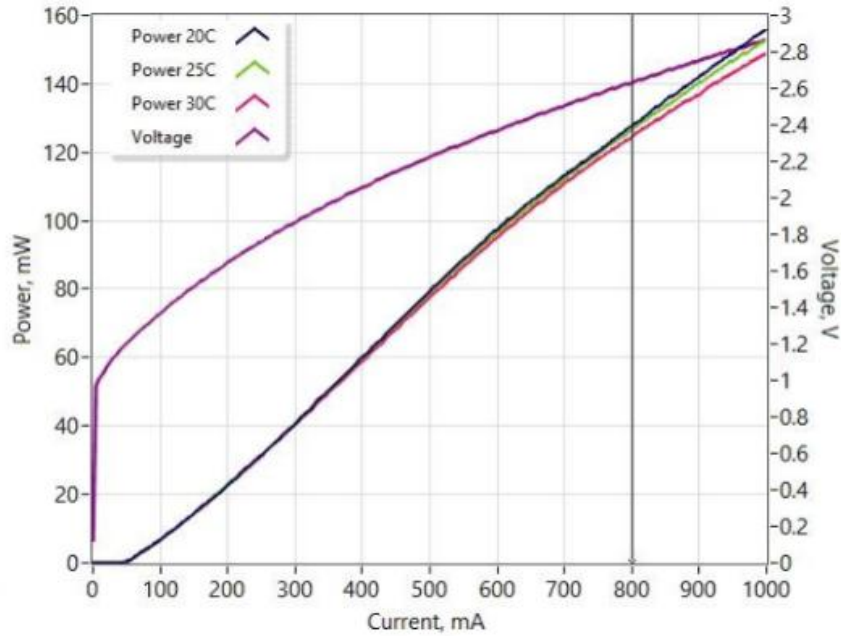


## Optical Spectra vs Temperature (resolution: 10 pm)

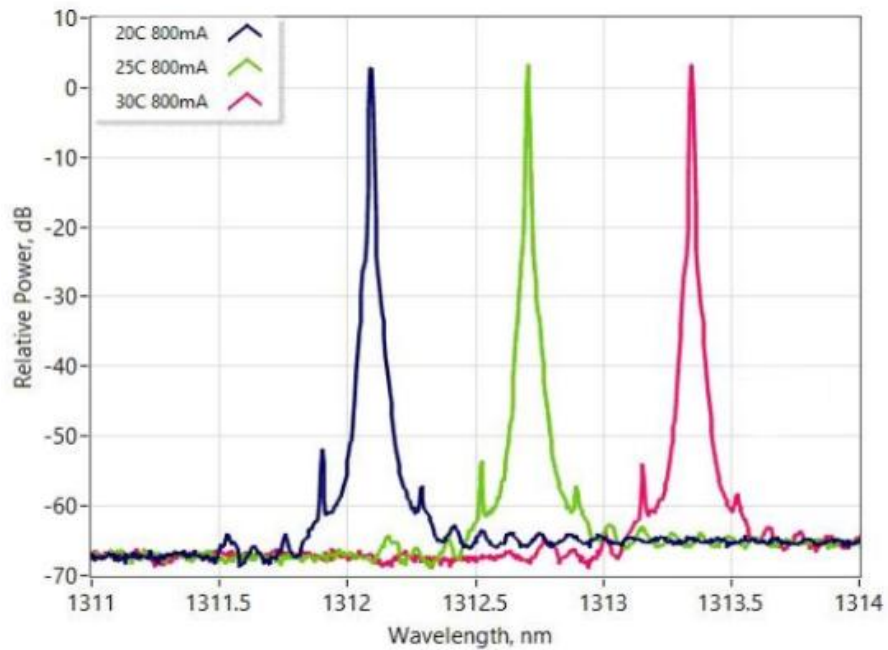

### Peak Wavelength Tuning by Current

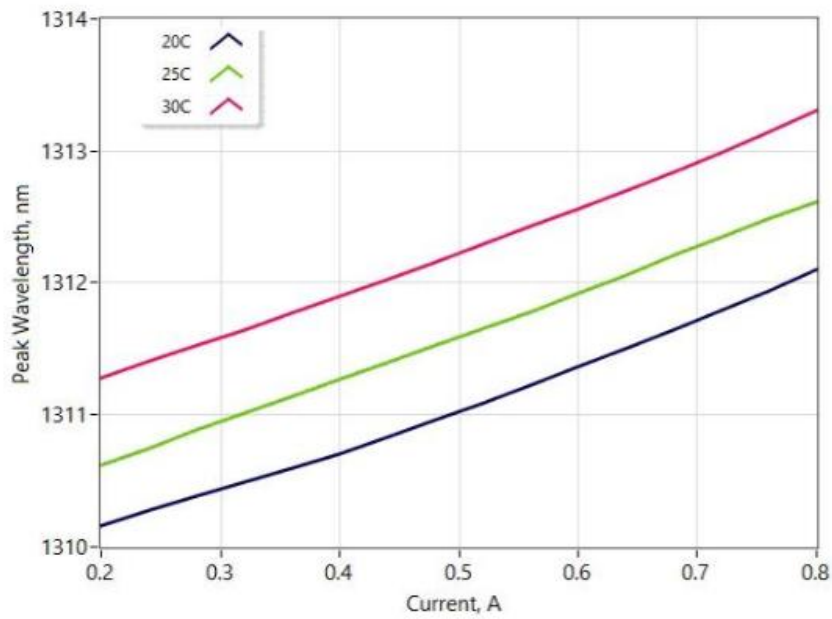

### RF line Spectrum

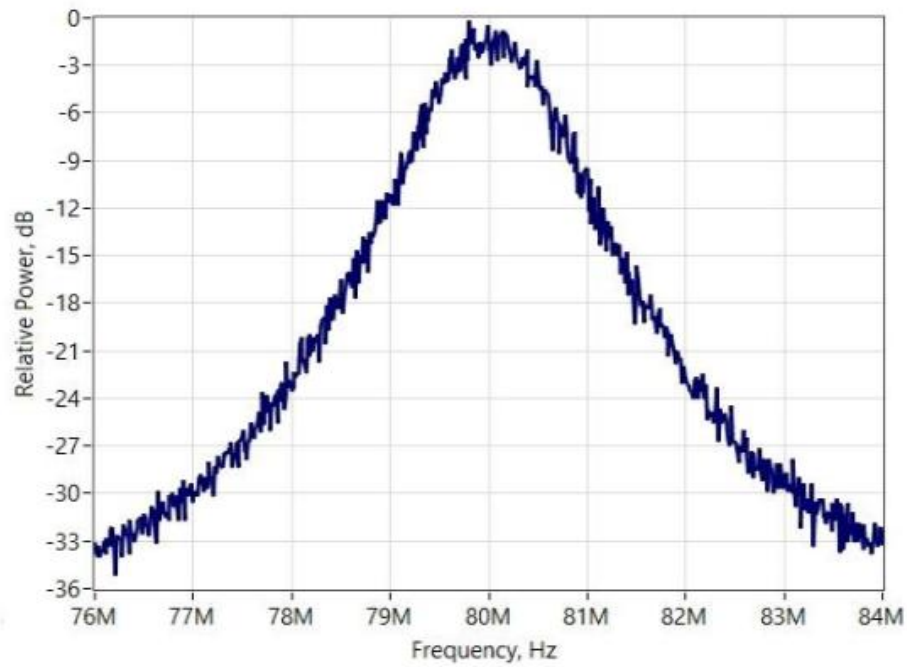



The above experimental data are tested and provided by the Advanced Optics Laboratory.

Parameter	Min	Max	Unit
Forward Current	—	1000	mA
Reverse Voltage	—	2	V
TEC Current	—	3	A
TEC Voltage	—	4	V
Chip Operating Temperature	5	50	°C
Case Operating Temperature	0	70	°C
Storage Temperature	-40	85	°C
Fiber Bend Radius	3	—	cm

## General Parameters

Thermistor Specifications			Fiber Specifications			
Parameter	Value	Unit	Parameter	PM1300	HI1060	Unit
Thermistor Type	NTC	—	Numerical Aperture, typical	0.12	0.14	—
Resistance @ 25 °C	10 ± 0.1	kΩ	Cutoff Wavelength	1200 ± 70	920 ± 50	Nm

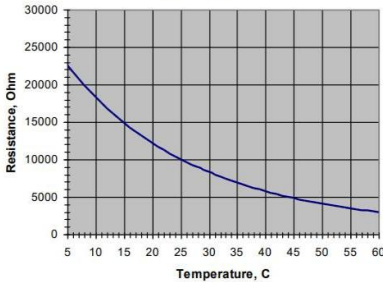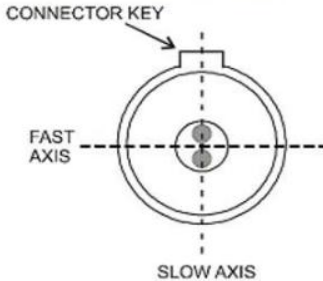

<b>Beta (25-85 °C)</b>	<b>3375 ± 1%</b>	<b>K</b>	<b>Mode Field Diameter</b>	<b>9.3 ± 0.5@1300nm</b>	<b>6.2 ± 0.3@1060nm</b>	<b>μm</b>		
<div data-bbox="252 1003 635 1305"> <p style="text-align: center;">R-T CURVE</p>  </div>			<b>Cladding Diameter</b>	<b>125 ± 1</b>	<b>125 ± 1</b>	<b>μm</b>		
			<b>Coating Diameter</b>	<b>245 ± 15</b>	<b>245 ± 15</b>	<b>μm</b>		
			<b>Loose Tube Diameter (Optional)</b>	<b>900</b>	<b>900</b>	<b>μm</b>		
			<b>Connector</b>	<b>FC/APC (narrow key)</b>				
			<b>Connector Alignment aligned with PANDA fiber</b>					
<div data-bbox="842 1323 1166 1603">  </div> <p style="text-align: center;"><b>Output light is polarized along the slow axis of the PM fiber.</b></p>								



## Typical Parameters of Fiber-Coupled DFB Laser Modules

Part Number	Integrated Optical Isolator <sup>1</sup>	Peak Wavelength Range <sup>2</sup>	Output Power	Operating Current	Threshold Current	SM SR	Wavelength Tuning vs. Temp	Wavelength Tuning vs. Current	PER
		nm	mW	mA	mA	dB	pm/K	pm/mA	dB
MP-DFB-9X X-YY-30	No	968 – 986	30	100	20	55	90	1.5	18
MP-DFB-10 XX-YY-50	No	1020 – 1120	50	200	30	55	100	2	18
MP-DFB-10 XX-YY-30-V O (New)	Yes	1020 – 1120	30	200	30	55	100	2	18
MP-DFB-11 XX-YY-50	No	1120 –	50	300	30	50	110	2	18



		1200							
<b>MP-DFB-11</b>		1120							
<b>XX-YY-30-V</b>	<b>Yes</b>	-	30	300	30	50	110	2	18
<b>O (New)</b>		1200							
<b>MP-DFB-12</b>		1200							
<b>XX-YY-50</b>	<b>No</b>	-	50	350	50	50	120	2	18
		1280							
<b>MP-DFB-12</b>		1200							
<b>XX-YY-60-V</b>	<b>Yes</b>	-	60	350	50	50	120	2	18
<b>O (New)</b>		1280							
<b>MP-DFB-13</b>		1280							
<b>XX-YY-50</b>	<b>No</b>	-	50	350	50	50	120	2.5	18
		1330							
<b>MP-DFB-13</b>		1280							
<b>XX-YY-60-V</b>	<b>Yes</b>	-	60	350	50	50	120	2.5	18
<b>O (New)</b>		1330							
<b>MP-DFB-13</b>		1280							
<b>XX-YY-100-</b>	<b>Yes</b>	-	100	800	60	50	120	4	18
<b>VO (New)</b>		1330							



## Notes

1 Free-space optical design

2 Any wavelength within this range is available with  $\pm 1$  nm tolerance

## Safety and Operating Instructions

The device emits invisible light that may be harmful to human eyes. Avoid direct eye exposure to the fiber connector during operation. When operating with the connector open, appropriate laser safety goggles must be worn.

Absolute maximum ratings shall be applied to the device only for short periods. Prolonged exposure to maximum ratings or exposure to more than one maximum rating may damage the device or degrade its reliability. Operation beyond the absolute maximum ratings may result in device failure or safety hazards.

A suitable power supply must be used to ensure the maximum forward current is not exceeded.

The device requires a proper heat sink. It must be mounted using 4 screws (cross-tightened with an initial torque of 0.075 Nm and final torque of 0.15 Nm) or a clamp. Flatness deviation of the heat sink surface must be less than 0.05 mm. Indium foil or soft thermally conductive material is recommended as the thermal interface between the package base and heat sink. Thermal grease is not recommended