


1557nm 10mW SM FBG stabilized Tunable laser diode

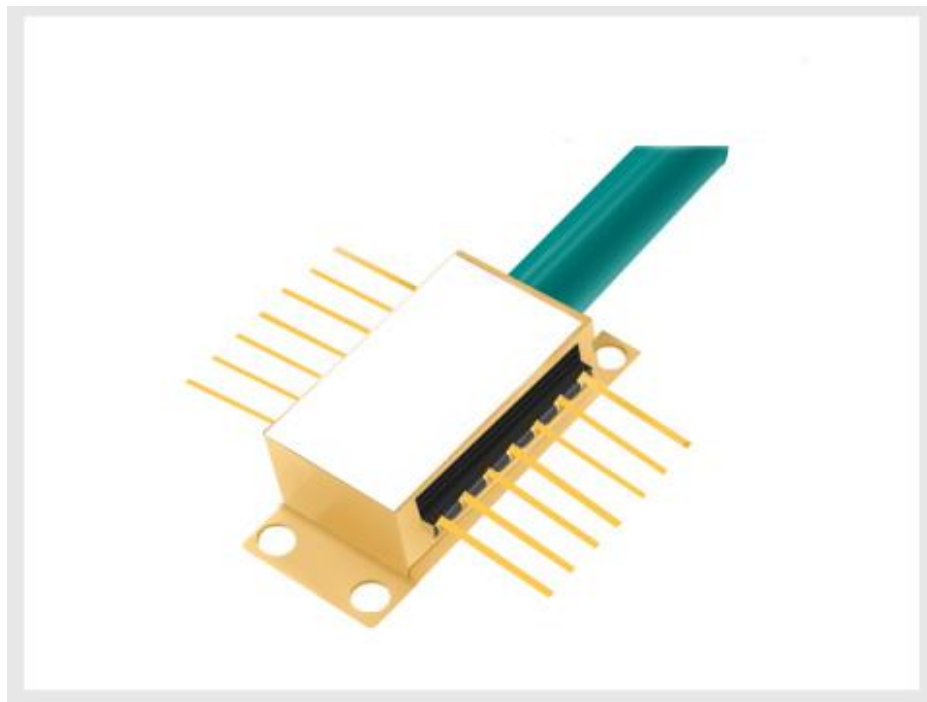

● Product Description

This series Fiber Bragg Grating laser is single frequency laser diode module designed for optical measurement and communication. The laser is packaged in 14-pin standard butterfly package with monitor photodiode and thermo-electric cooler (TEC). The Single-Frequency Continuous Tuning Range: > 1.2 nm by adjust the Mini PZT Built in the laser diode.

● Product features

Optical output: 10mW; Narrow linewidth ($\Delta\nu < 1\text{MHz}$); Wavelength: 1557nm @ 25°C; SMor PMFiber ($\varnothing 0.9\text{mm}$); FC-APC connector; 14-pin butterfly package; Internal monitor PD and TEC; Low power consumption

● Part Number

MP-NL-1557-A-A81-SA-PZT

● Application area

Laser interference experiment | Drop-side of DWDM long-haul transport equipment | Optical Test and Instrumentation | Microwave Photonics | CATV networks | Sensors

● Core parameters

Wavelength	Output Power	Fiber Type
1557nm	10mW	SM

● General Parameters

Optical Characteristics (at 25 °C laser temperature)

Parameter	Symbol	Condition	Min.	Typical	Max.	Unit
Center Wavelength	λ_c	TL=15~ 35°C CW	1556.5	1557.0	1558.5	nm


Peak Optical Output Power	PO	-	10	-	30	mW
Spectral linewidth	LW	-	-	1	1	MHz
Side-mode Suppression Ratio	SMSR	CW	30	40	-	dB
Optical isolation	-	-10 < TC < +70 °C	30	-	-	dB
Polarization Extinction Ratio	ER	-	20	-	-	dB
Relative Intensity Noise	RIN	CW, output power 5mW	-	-	-150	dB/HZ
Wavelength drift with case (-10 to 70 °C) temperature	$\Delta\lambda$	TL=15~35°C	-	-	± 30	pm
Wavelength Temperature coefficient	$\Delta\lambda/\Delta T$	TL=15~35°C	-	15	30	pm/°C
Wavelength Current coefficient	$\Delta\lambda/\Delta I$	-	-	1.5	2	pm/mA
Mode Hop Free Range	ΔI			30		mA
Single-Frequency Continuous Tuning Range	Δf			3		GHz

Electrical Characteristics (at 25 °C laser temperature)


Parameter	Symbol	Condition	Min.	Typical	Max.	Unit
Threshold Current	ITH	-	-	45	65	mA
Slope Efficiency	η	CW output power 30 mW	0.064	0.1	-	mW/mA
Operating current	Iop	CW	-	250	300	mA
TEC set temperature	Ts	-	15	-	35	°C
Laser Forward Voltage	VF	CW output power 5 mW	-	1.3	1.8	V
Monitor Dark Current	ID	-	-	-	0.1	μ A
Input Impedance	ZIN	-	22	25	28	Ω
Thermistor Current	ITC	-	10	-	100	μ A
Thermistor Resistance	RTH	TL = 25 °C	9.5	10	10.5	K Ω
TEC Current	ITEC	TL = 25 °C, TC = 70 °C	-	-	1.8	A

TEC Voltage	VTEC	TL = 25 °C, TC = 70 °C	-	-	3.5	V
TEC capacity	ΔT	Tc = 70°C	-	-	50	°C
Tuning Range	Δf		1		1.5	nm
PZT Tuning Voltage	VT		0		150	V
Mode Hop Free Range	ΔI			3		mA


Spectrum

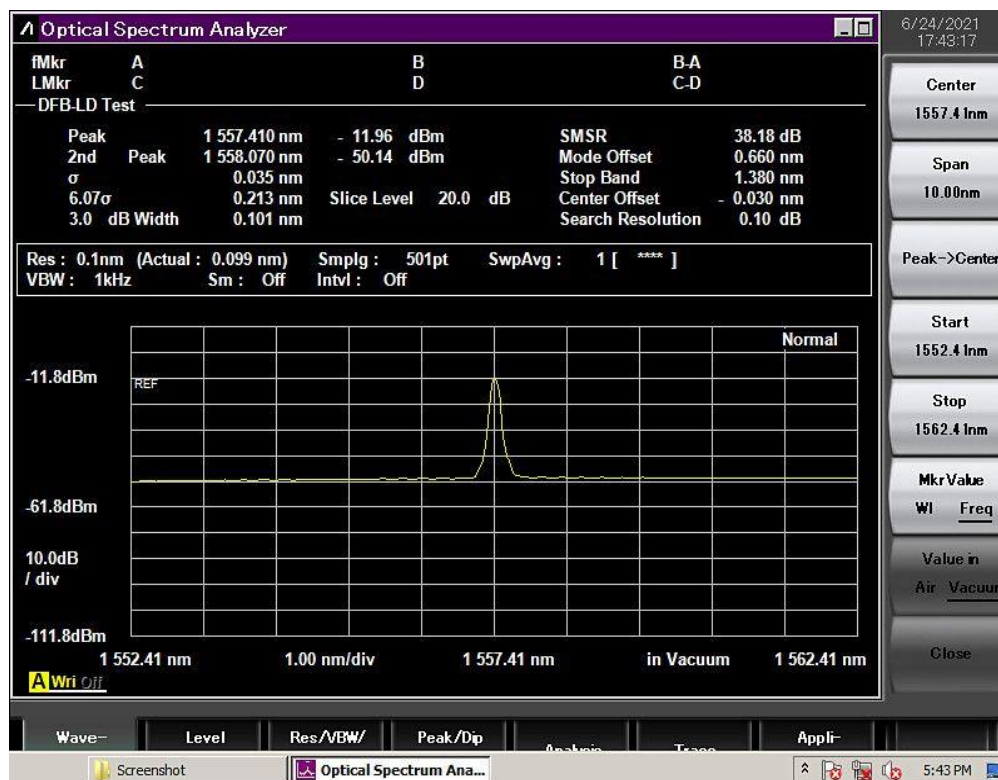


Voltage Vs Wavelength(PZT Version)

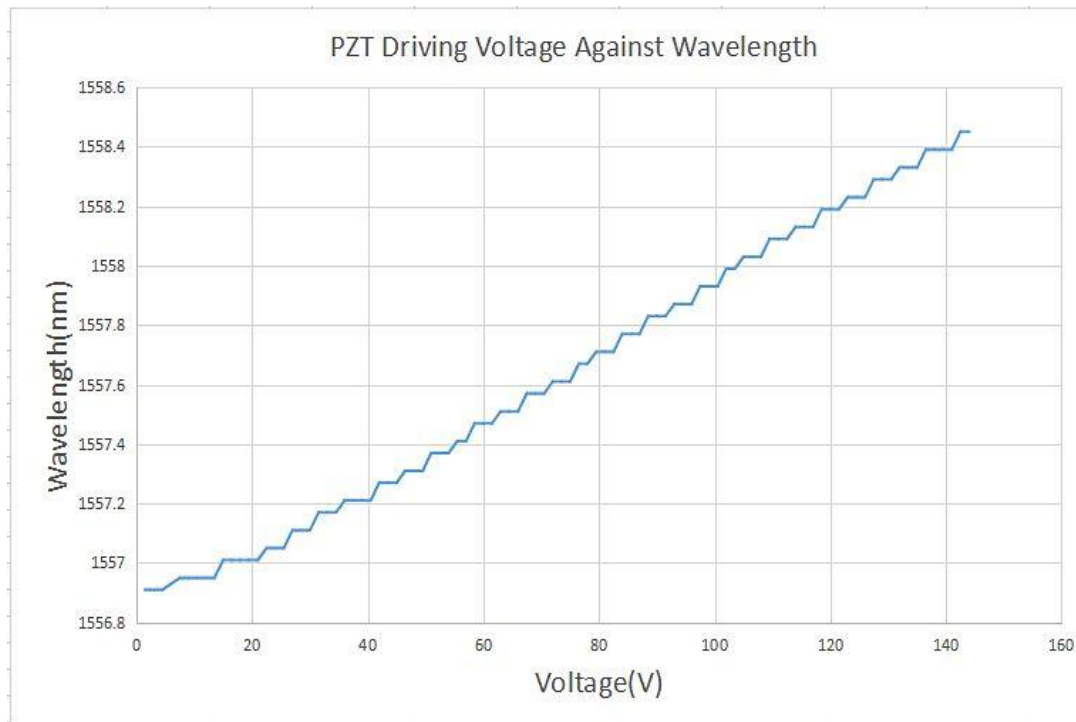


L-I Curve

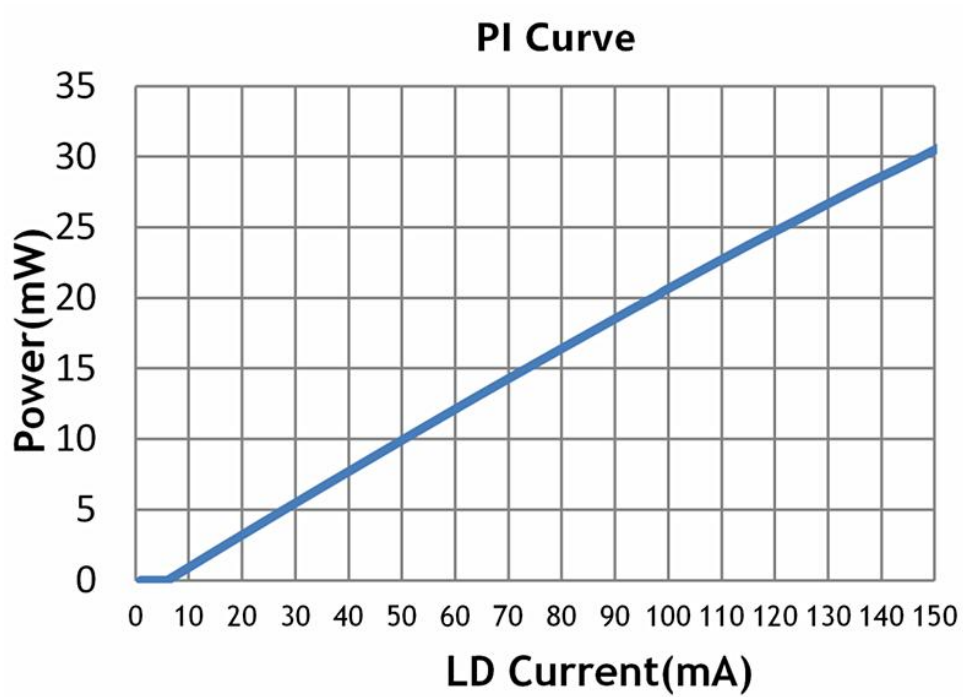


Linewidth Testing Result

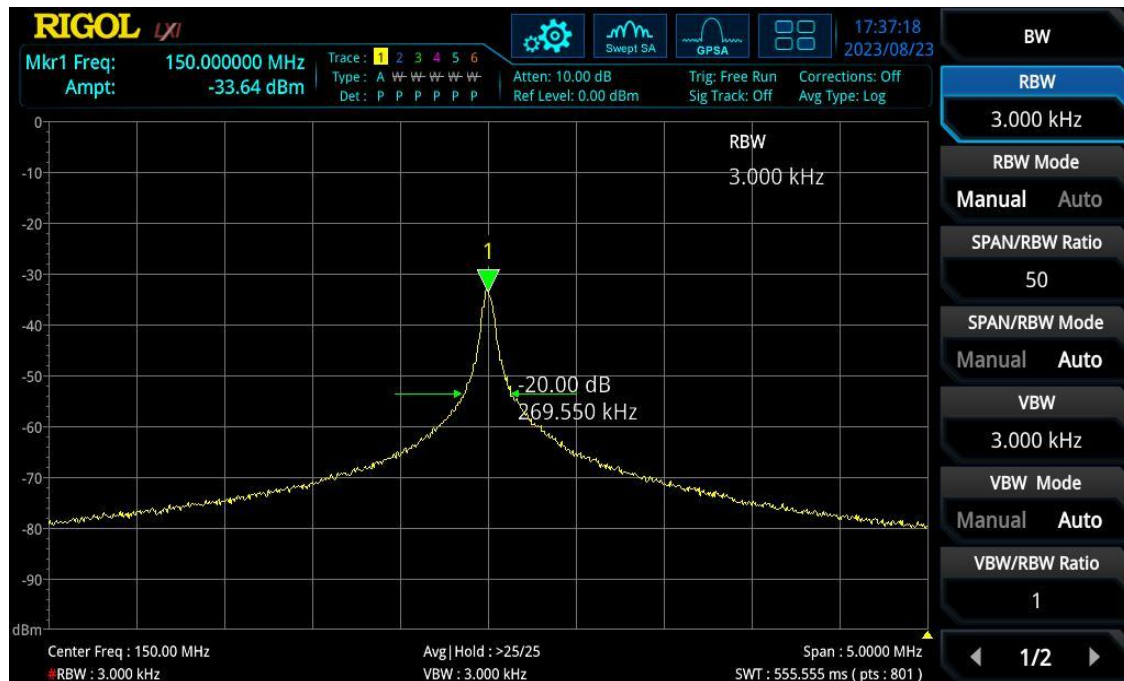


Wavelength Stability

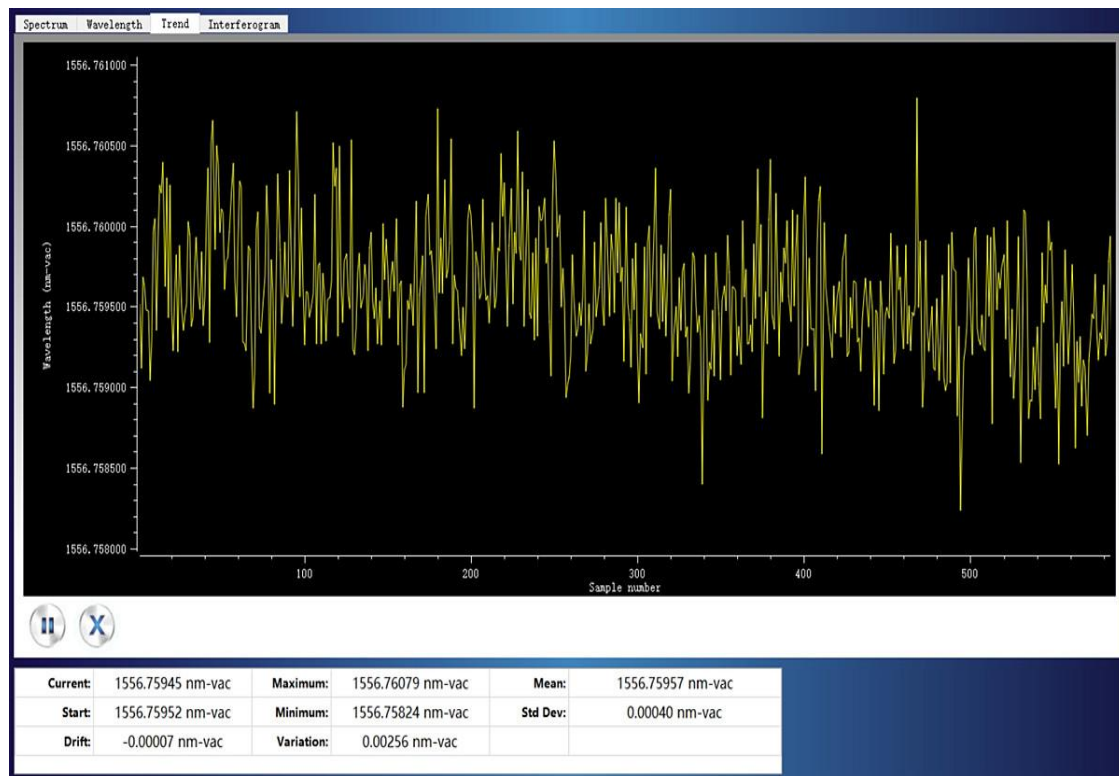

1557nm Narrow Linewidth Laser Module PZT Sweep Frequency Test

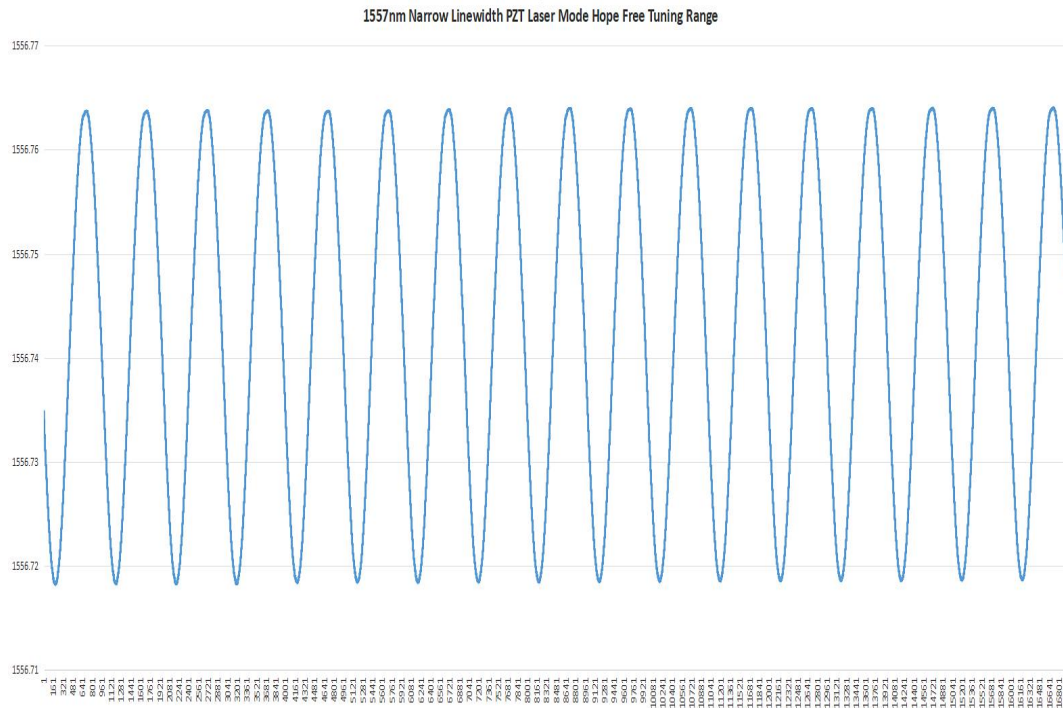


Working Structure

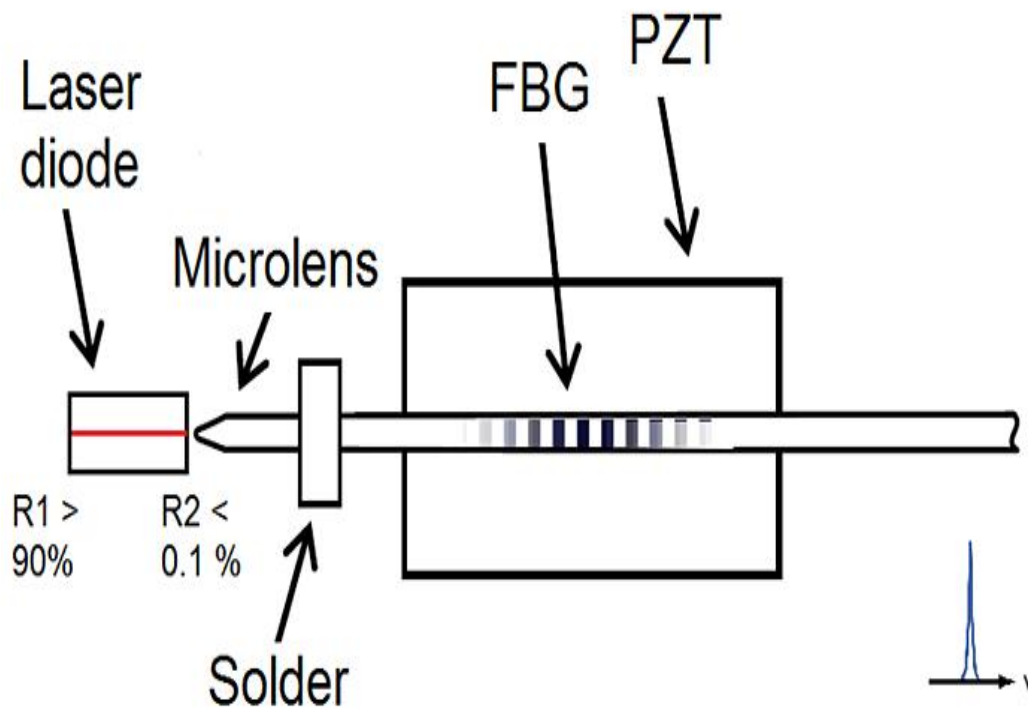


Absolute maximum ratings:

Parameter	Unit	Min	Typ	Max
Case Temperature	°C	-40	25	70
Chip Temperature	°C	+10	25	40
Operating Current	mA	0	250	300
Forward Voltage	V	0.8	1.4	3.0
TEC Current	A	-	1.4	1.8
Reverse Voltage(LD)	V	-	-	1.8

Pin definition

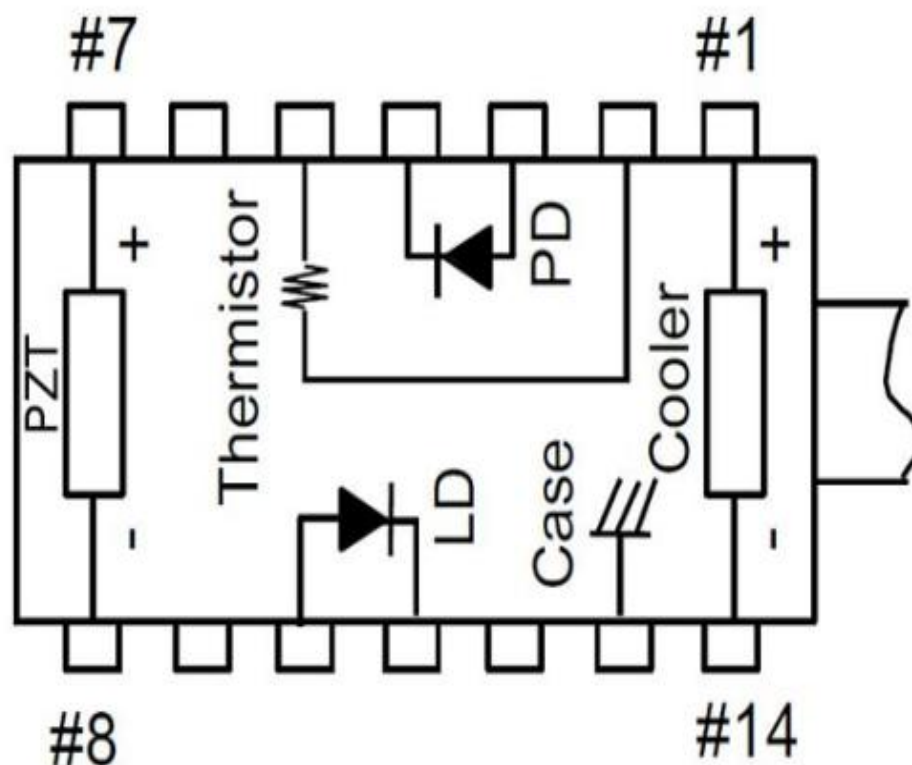


None PZT Bulit inside			
NO	Parameter	NO	Parameter
1	Cooler anode+	8	PZT tuning -
2	Thermistor	9	NC
3	PD anode-	10	LD anode+
4	PD cathode+	11	LD cathode-
5	Thermistor	12	NC
6	NC	13	Case
7	PZT tuning +	14	Cooler cathode-

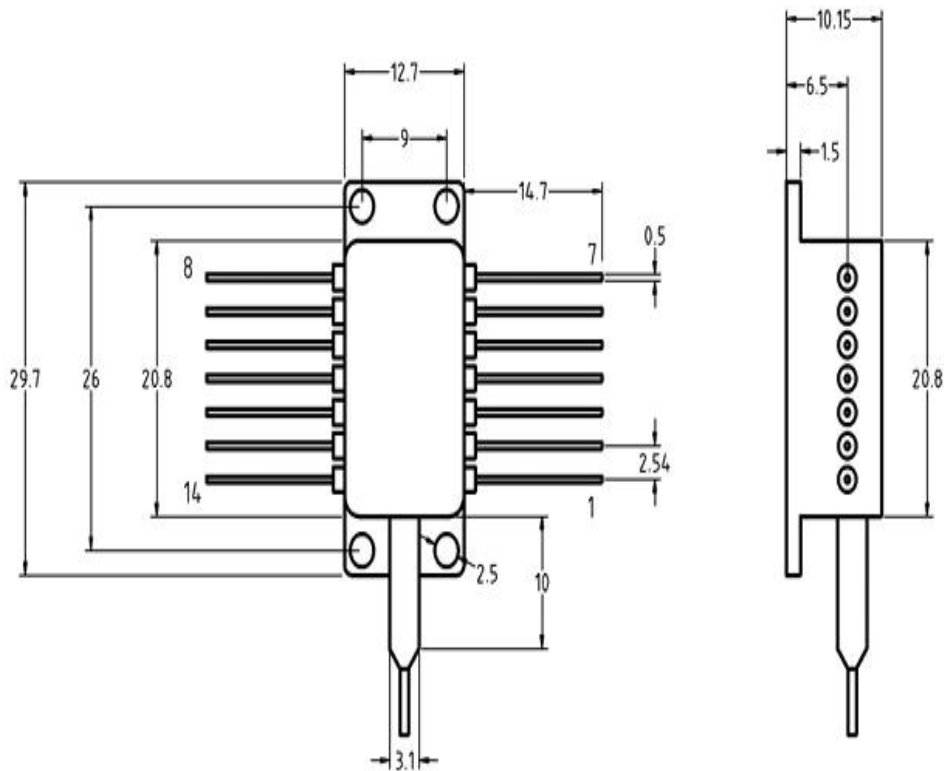

Fiber Pigtail Specifications

Parameters	Description
Fiber Type	SM fiber
Jacket Type	900μm loose tube
Pigtail Length	1.0±0.1m
Connector Type	FC/APC
PM fiber Connector Orientation	Please see the right figure

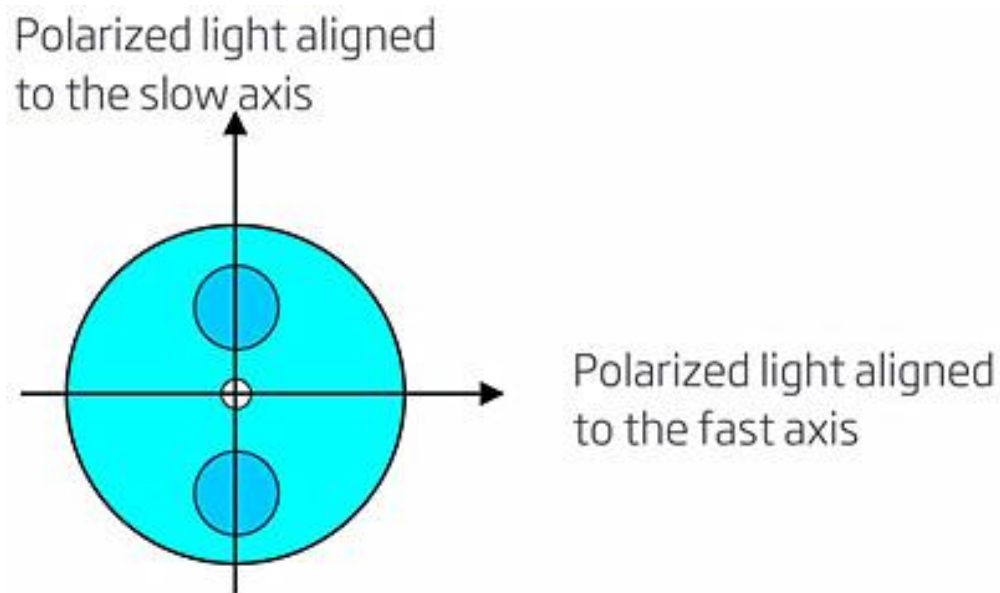

Note: The PM fiber and the connector key are aligned to the slow axis, fast axis is blocked